
Cameo

Pixbar 600 Pro IP65

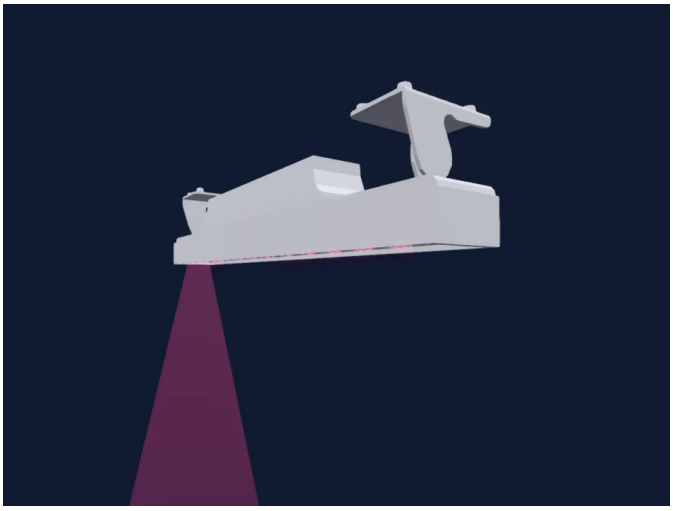

Manufacturer	**Cameo**
Type	**PAR**
DMX modes	**9**
DMX footprint	**2, 6, 8, 12, 78 channels**
Beam angle	**25°**
Size (W × H × D)	**771 × 102 × 141 mm**
GDTF fixture type	**47F945D2-BCCF-4BC7-AAC3-1E…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Dimmer

DMX modes

2 Channel	2 ch
6 Channel 1	6 ch
6 Channel 2	6 ch
74 Channel	6 ch
74 Channel INV	6 ch
8 Channel	8 ch
12 Channel	12 ch
78 Channel	78 ch
78 Channel INV	78 ch

2 Channel

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Macro1	0	

6 Channel 1

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	0–5 Strobe Open 6–10 Strobe Closed 11–250 Strobe Slow to Fast 251–255 Strobe Open 1
3	Color Macro1	0	
4	White	0	
5	Color Add RY	0	
6	UV	0	

6 Channel 2

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add RY	0	
6	UV	0	

74 Channel

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	0–5 Strobe Open 6–10 Strobe Closed 11–33 Pulse Random 34–56 Ramp Up Random 57–79 Ramp Down Random 80–102 Random Strobe Effect 103–127 Strobe Break Effect 128–250 Strobe Slow to Fast 251–255 Strobe Open 1
3	Blue	255	
4	White	255	
5	Color Add RY	0	
6	UV	0	

74 Channel INV

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	

74 Channel INV (continued)

Ch	Function	Default	DMX values
2	Shutter1Strobe	0	0–5 Strobe Open 6–10 Strobe Closed 11–33 Pulse Random 34–56 Ramp Up Random 57–79 Ramp Down Random 80–102 Random Strobe Effect 103–127 Strobe Break Effect 128–250 Strobe Slow to Fast 251–255 Strobe Open 1
3	Blue	255	
4	White	255	
5	Color Add RY	0	
6	UV	0	

8 Channel

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	0–5 Strobe Open 6–10 Strobe Closed 11–33 Pulse Random 34–56 Ramp Up Random 57–79 Ramp Down Random 80–102 Random Strobe Effect 103–127 Strobe Break Effect 128–250 Strobe Slow to Fast 251–255 Strobe Open 1
3	Red	0	
4	Green	0	
5	Blue	0	
6	White	0	
7	Color Add RY	0	
8	UV	0	

12 Channel

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	0–5 Strobe Open 6–10 Strobe Closed 11–33 Pulse Random 34–56 Ramp Up Random 57–79 Ramp Down Random 80–102 Random Strobe Effect 103–127 Strobe Break Effect 128–250 Strobe Slow to Fast 251–255 Strobe Open 1
3	Red	0	
4	Green	0	
5	Blue	0	
6	White	0	
7	Color Add RY	0	
8	UV	0	

12 Channel (continued)

Ch	Function	Default	DMX values
9	Color Macro1	0	
10	C TC	0	0–5 Off 6–255 Cold to Warm
11	No Feature	0	
12	No Feature	0	

78 Channel

78 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	
3	Blue	255	
4	White	255	
5	Color Add RY	0	
6	UV	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	

78 Channel (continued)

Ch	Function	Default	DMX values
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Reserved 49	0	
50	Reserved 50	0	
51	Reserved 51	0	
52	Reserved 52	0	
53	Reserved 53	0	
54	Reserved 54	0	
55	Reserved 55	0	
56	Reserved 56	0	
57	Reserved 57	0	
58	Reserved 58	0	
59	Reserved 59	0	
60	Reserved 60	0	
61	Reserved 61	0	
62	Reserved 62	0	
63	Reserved 63	0	
64	Reserved 64	0	
65	Reserved 65	0	
66	Reserved 66	0	
67	Reserved 67	0	
68	Reserved 68	0	
69	Reserved 69	0	
70	Reserved 70	0	
71	Reserved 71	0	
72	Reserved 72	0	
73	Reserved 73	0	
74	Reserved 74	0	
75	Color Macro1	0	
76	C TC	0	
77	No Feature	0	
78	No Feature	0	

78 Channel INV

78 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	
3	Blue	255	
4	White	255	
5	Color Add RY	0	
6	UV	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	

78 Channel INV (continued)

Ch	Function	Default	DMX values
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Reserved 49	0	
50	Reserved 50	0	
51	Reserved 51	0	
52	Reserved 52	0	
53	Reserved 53	0	
54	Reserved 54	0	
55	Reserved 55	0	
56	Reserved 56	0	
57	Reserved 57	0	
58	Reserved 58	0	
59	Reserved 59	0	
60	Reserved 60	0	
61	Reserved 61	0	
62	Reserved 62	0	
63	Reserved 63	0	
64	Reserved 64	0	
65	Reserved 65	0	
66	Reserved 66	0	
67	Reserved 67	0	
68	Reserved 68	0	
69	Reserved 69	0	
70	Reserved 70	0	
71	Reserved 71	0	
72	Reserved 72	0	
73	Reserved 73	0	
74	Reserved 74	0	
75	Color Macro1	0	
76	C TC	0	
77	No Feature	0	
78	No Feature	0	