
Chauvet DJ

COLORband Q3BT

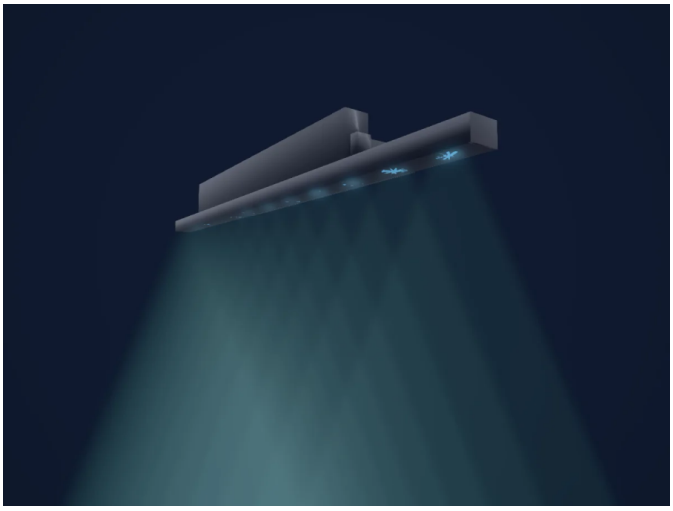

Manufacturer	**Chauvet DJ**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 6, 16 channels**
Beam angle	**42°**
Heads / cells	**3**
Size (W × H × D)	**1000 × 98 × 140 mm**
GDTF fixture type	**818D00D2-1D76-5C51-9EF3-29…**

Controls

Extra LED colours · RGB colour mixing · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

4CH	4 ch
6CH	6 ch
16CH	16 ch

4CH

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Amber	0	

6CH

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Amber	0	
5	Dimmer	0	
6	Shutter / Strobe	0	0–15 No function 16–255 Strobe, slow to fast

16CH

16 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Amber	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	Amber	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Amber	0	
13	Shutter / Strobe	0	0–15 No function 16–255 Strobe, slow to fast
14	Effect	0	0–5 No function 6–36 Auto program 1 (programs 2–7) 37–68 Auto program 2 69–100 Auto program 3 101–132 Auto program 4 133–164 Auto program 5 165–196 Auto program 6 197–228 Auto program 7 229–255 Auto program 8
15	Effect 2	0	0–250 Program speed, slow to fast 251–255 Sound-active mode
16	Dimmer	0	

Fixture model: gdtf-chauvet-dj-colorband-q3bt-2000040021
Creator: HitLight
Modifications: Original HitLight 3D housing: scripted parametric geometry modelled by HitLight from public product photos and the manufactu...