
Chauvet DJ

COLORband Q3BT ILS

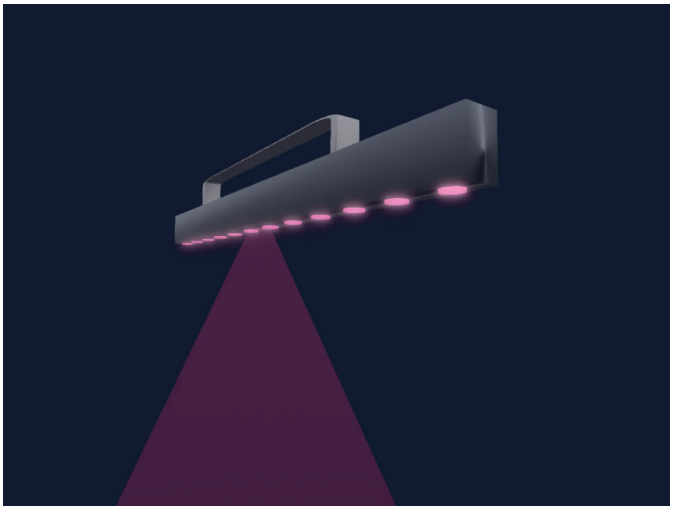

Manufacturer	**Chauvet DJ**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 6, 16 channels**
Beam angle	**50°**
Heads / cells	**3**
Size (W × H × D)	**562 × 70 × 40 mm**
GDTF fixture type	**A1A10060-5980-4EE2-8DAB-BA…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

4Ch	4 ch
6Ch	6 ch
16Ch	16 ch

4Ch

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Add RY	0	

6Ch

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Add RY	0	
5	Dimmer	0	0–254 Closed 255–255 Open
6	Strobe Mode Strobe	0	0–15 No Function 16–255 Strobe Slow to Fast

16Ch

16 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Add RY	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	Color Add RY	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Color Add RY	0	
13	Strobe Rate	0	0–15 No Function 16–255 Strobe Slow to Fast
14	Color Effects1	0	0–5 No function 6–36 Auto program 1 - PLAY ALL 37–68 Auto program 2 69–100 Auto program 3 101–132 Auto program 4 133–164 Auto program 5 165–196 Auto program 6 197–228 Auto program 7 229–255 Auto program 8
15	Color Effects Speed	0	0–250 Program speed - slow to fast 251–255 Sound-active mode
16	Dimmer	0	0–254 Closed 255–255 Open