
Chauvet DJ

EVE P-130 RGB

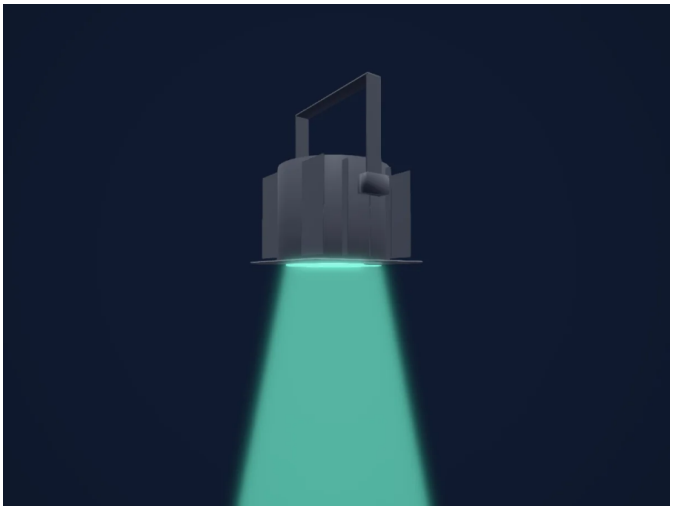

Manufacturer	**Chauvet DJ**
Type	**PAR**
DMX modes	**3**
DMX footprint	**3, 4, 9 channels**
Beam angle	**25°**
Size (W × H × D)	**245 × 305 × 220 mm**
GDTF fixture type	**088212A4-76F0-5CFE-A493-43E…**

Controls

RGB colour mixing · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

3CH	3 ch
4CH	4 ch
9CH	9 ch

3CH

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

4CH

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	

9CH

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	Color Macro1	0	0–15 No function 16–255 Color macros
6	Shutter / Strobe	0	0–15 No function 16–255 Strobe, slow to fast
7	Effect	0	0–31 No function 32–63 0–100% 64–95 100–0% 96–127 100–0–100% 128–159 Color fade program 160–191 7-color snap program 192–223 18-color snap program 224–249 Sound-active program 1 250–255 Sound-active program 2
8	Effect Speed	0	0–10 Program speed, slow to fast 11–255 Sound sensitivity, low to high
9	Control	52	0–51 Dimmer speed set from display 52–101 Dimmer speed mode off 102–152 Dimmer speed mode 1 (fast) 153–203 Dimmer speed mode 2 (medium) 204–255 Dimmer speed mode 3 (slow)

Fixture model: gdtf-chauvet-dj-eve-p-130-rgb-2000040016
Creator: HitLight
Modifications: Original HitLight 3D housing: scripted parametric geometry modelled by HitLight from public product photos and the manufactu...