
Chauvet DJ

FX Par 9

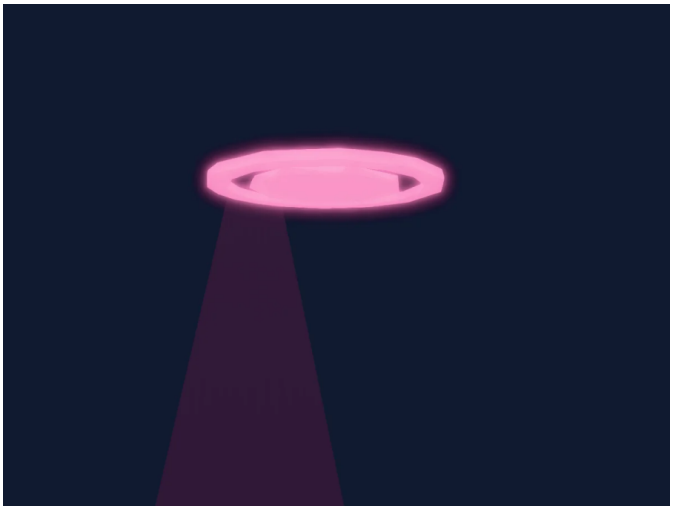

Manufacturer	**Chauvet DJ**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**3, 6, 9, 23 channels**
Beam angle	**25°**
Heads / cells	**4**
Size (W × H × D)	**272 × 189 × 53 mm**
GDTF fixture type	**F7A71351-B86B-406F-A531-E8…**

Controls

Extra LED colours · RGB colour mixing · Dimmer · Pixel control

Safety-relevant functions

Strobe

DMX modes

3 Ch mode	3 ch
6 Ch mode	6 ch
9 Ch mode	9 ch
23 Ch Mode	23 ch

3 Ch mode

3 channels

Ch	Function	Default	DMX values
1	Programs	0	
2	Program Speed	0	
3	Dimmer	0	

6 Ch mode

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	UV	0	
5	Shutter / Strobe	0	
6	Shutter / Strobe	0	

9 Ch mode

9 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	UV	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	Shutter / Strobe	0	
9	Shutter / Strobe	0	

23 Ch Mode

23 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	UV	0	
5	Shutter / Strobe	0	
6	Red	0	
7	Green	0	
8	Blue	0	
9	UV	0	
10	Shutter / Strobe	0	
11	Red	0	
12	Green	0	
13	Blue	0	
14	UV	0	
15	Shutter / Strobe	0	
16	Red	0	

23 Ch Mode (continued)

Ch	Function	Default	DMX values
17	Green	0	
18	Blue	0	
19	Shutter / Strobe	0	
20	Shutter / Strobe	0	
21	Programs	0	
22	Program Speed	0	
23	Dimmer	0	