
Chauvet DJ

# Shocker panel FX

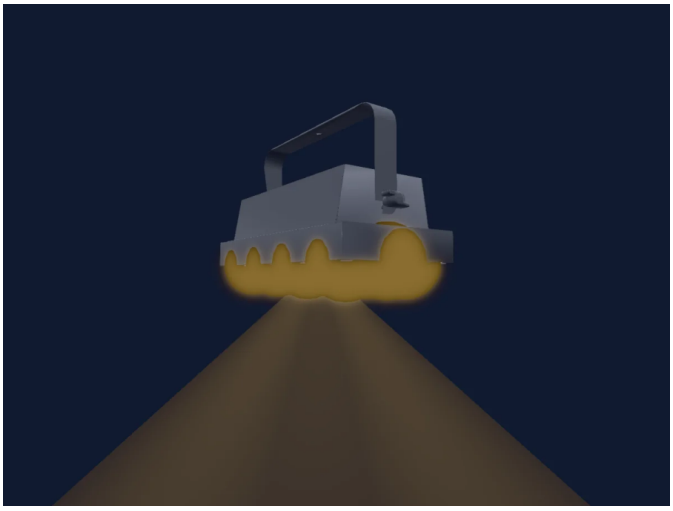

| | |
|---|---|
| Manufacturer | **Chauvet DJ** |
| Type | **Blinder** |
| DMX modes | **1** |
| DMX footprint | **34 channels** |
| Beam angle | **76-119°** |
| Heads / cells | **8** |
| Size (W × H × D) | **410 × 229 × 203 mm** |
| GDTF fixture type | **ED05218B-27D4-455E-9F41-1B…** |

## Controls

Dimmer · Pixel control

## Safety-relevant functions

Fixture reset

## DMX modes

34ch 34 ch

## 34ch

34 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Color RGBRed | 0 | |
| 3 | Color RGBGreen | 0 | |
| 4 | Color RGBBlue | 0 | |
| 5 | Color RGBRed | 0 | |
| 6 | Color RGBGreen | 0 | |
| 7 | Color RGBBlue | 0 | |
| 8 | Color RGBRed | 0 | |
| 9 | Color RGBGreen | 0 | |
| 10 | Color RGBBlue | 0 | |
| 11 | Color RGBRed | 0 | |
| 12 | Color RGBGreen | 0 | |
| 13 | Color RGBBlue | 0 | |
| 14 | Color RGBRed | 0 | |
| 15 | Color RGBGreen | 0 | |
| 16 | Color RGBBlue | 0 | |
| 17 | Color RGBRed | 0 | |
| 18 | Color RGBGreen | 0 | |
| 19 | Color RGBBlue | 0 | |
| 20 | Color RGBRed | 0 | |
| 21 | Color RGBGreen | 0 | |
| 22 | Color RGBBlue | 0 | |
| 23 | Color RGBRed | 0 | |
| 24 | Color RGBGreen | 0 | |
| 25 | Color RGBBlue | 0 | |
| 26 | Dimmer | 0 | |
| 27 | Dimmer | 0 | |
| 28 | Dimmer | 0 | |
| 29 | Dimmer | 0 | |
| 30 | Dimmer | 0 | |
| 31 | Dimmer | 0 | |
| 32 | Dimmer | 0 | |
| 33 | Dimmer | 0 | |
| 34 | Function | 0 | 0–25 Dim Curve Off<br>26–50 Dim Curve 1<br>51–75 Dim Curve 2<br>76–100 Dim Curve 3<br>101–125 Dim Set By Unit Display<br>126–255 RESET Fixture |