
Chauvet Professional

Freedom Flex H9

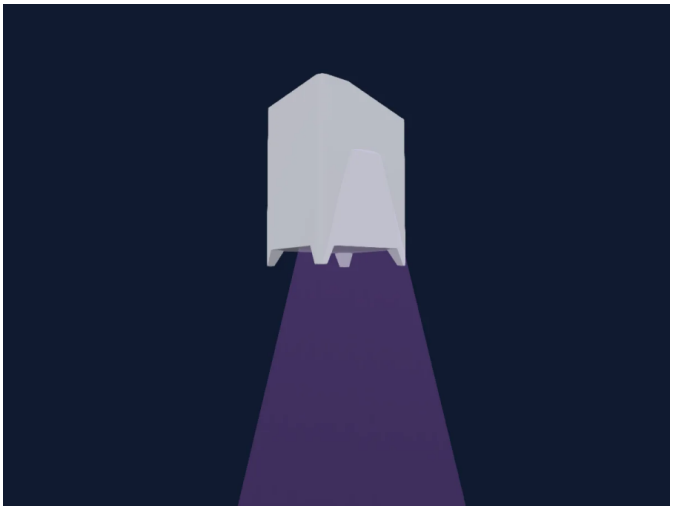

Manufacturer	**Chauvet Professional**
Type	**PAR**
DMX modes	**3**
DMX footprint	**6, 8, 16 channels**
Beam angle	**28°**
Size (W × H × D)	**128 × 202 × 128 mm**
GDTF fixture type	**C738F03D-1E59-4960-A6BB-3F…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

Mode 6CH	6 ch
Mode 8CH	8 ch
Mode 16CH	16 ch

Mode 6CH

6 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add RY	0	
5	White	0	
6	UV	0	

Mode 8CH

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	
5	Color Add RY	0	
6	White	0	
7	UV	0	
8	Strobe Rate	0	0–15 Strobe Off 16–255 Strobe Hz

Mode 16CH

16 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	
5	Color Add RY	0	
6	White	0	
7	UV	0	
8	Strobe Rate	0	0–15 Strobe Off 16–255 Strobe Hz
9	Color Macro1	0	0–10 Off 11–50 R100 G+ B0 51–70 R+ G100 B0 71–90 R0 G+ B100 91–110 R+ G0 B100 111–130 R100 G0 B+ 131–150 R100 G+ B+ 151–170 R+ G+ B100 171–200 R100 G100 B+ A100 201–205 C1 206–210 C2 211–215 C3 216–220 C4 221–225 C5 226–230 C6 231–235 C7 236–240 C8 241–245 C9 246–250 C10 251–255 C11

Mode 16CH (continued)

Ch	Function	Default	DMX values
10	Auto Programscontro	0	0–21 OFF 22–43 Program 1 44–65 Program 2 66–87 Program 3 88–109 Program 4 110–131 Program 5 132–153 Program 6 154–175 Program 7 176–197 Program 8 198–219 Program 9 220–241 Program 1-9 242–255 Sound Show
11	Color Dimmer	0	
12	Color Effects1	0	
13	B Color Dim	0	
14	Color Effects2	0	
15	Color Mix MSpeed	0	
16	Dimmer Curve	0	0–51 AS Menu 52–101 Off 102–152 Fast 153–203 Mid 204–255 Slow