
Chauvet Professional

Ovation F-145WW

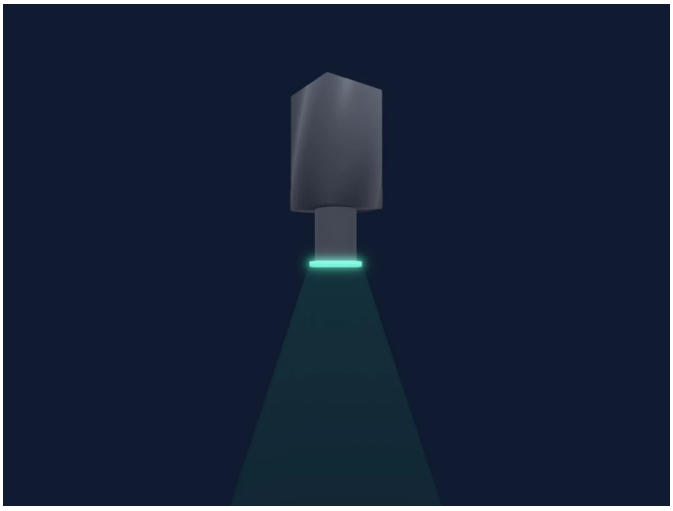

Manufacturer	**Chauvet Professional**
Type	**Spot**
DMX modes	**2**
DMX footprint	**2, 6 channels**
Beam angle	**16-65°**
Size (W × H × D)	**250 × 450 × 250 mm**
GDTF fixture type	**42C6732E-38B3-11E8-8914-525…**

Controls

Zoom · Strobe · Dimmer

Safety-relevant functions

Fixture reset · Strobe

DMX modes

2CH: Dim+Zoom	2 ch
6 Channel 16-Bit	6 ch

2CH: Dim+Zoom

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Zoom	128	

6 Channel 16-Bit

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Zoom	0	
4	Shutter / Strobe	0	0–9 Open 1 10–99 Strobe- Slow to Fast 100–109 Open 2 110–179 Lightning- Slow to Fast 180–189 Open 3 190–255 Random- Slow to Fast
5	Zoom Reset	0	0–200 No Function 1 201–220 ZoomReset 221–255 No Function 2
6	Control1	0	0–7 No Function 8–15 Dimmer Reset 16–23 Dimmer: S-Curve 24–31 Dimmer: Linear 32–39 Dimmer: Square 40–47 Dimmer: Inverted Square 48–55 Dimmer Speed Mode Off 56–63 Dimmer Speed Mode 1 64–71 Dimmer Speed Mode 2 72–79 Dimmer Speed Mode 3 80–87 Fan Auto 88–95 Fan On 96–103 Fan Off 104–111 Fan Silent 112–255 No Function 1