
Chauvet Professional

Ovation H-265 WW

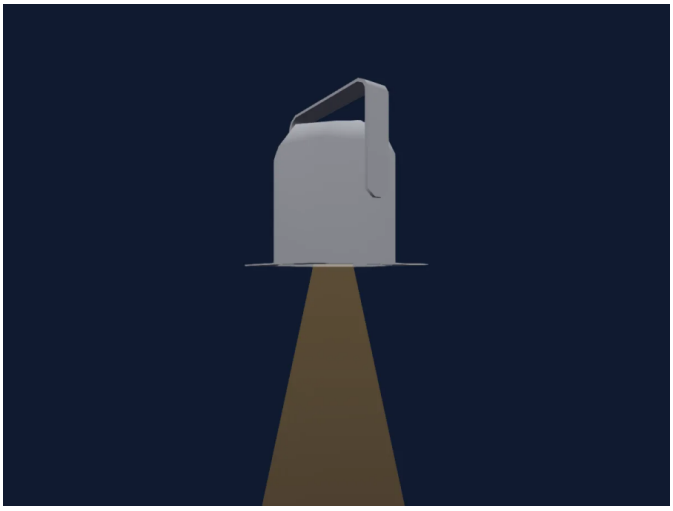

Manufacturer	**Chauvet Professional**
Type	**PAR**
DMX modes	**2**
DMX footprint	**1, 6 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**B9B579A3-3820-47A3-A908-22…**

Controls

Dimmer

Safety-relevant functions

Fixture reset

DMX modes

1 Ch Mode	1 ch
6 Ch Mode	6 ch

1 Ch Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

6 Ch Mode

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Strobe Rate	0	0–10 No Function 11–255 StrobeRate Slow to Fast
4	Auto Programs	0	
5	Auto Speed	0	
6	Control1	0	0–7 No Function 8–15 Dimmer Reset 16–23 Dimmer: S-Curve 24–31 Dimmer: linear 32–39 Dimmer: Square 40–47 Dimmer: Inverted Square 48–55 Dimmer speed mode off 56–63 Dimmer speed mode 1 64–71 Dimmer speed mode 2 72–79 Dimmer speed mode 3 80–255 No Function 1