
Chauvet Professional

Strike Array 1 26 channel

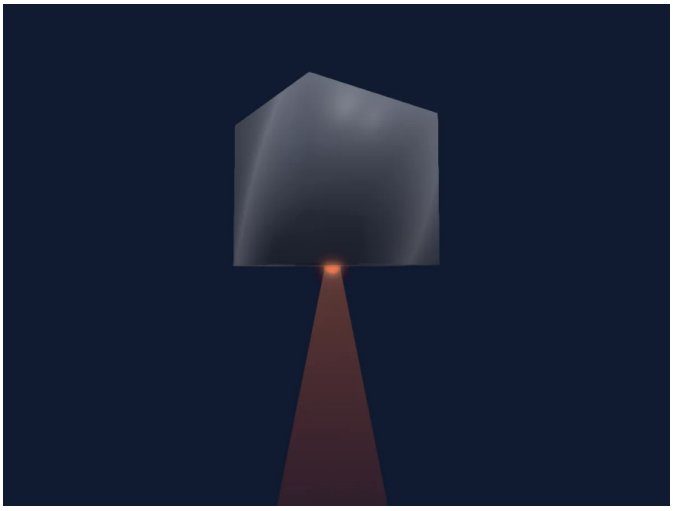

Manufacturer	**Chauvet Professional**
Type	**PAR**
DMX modes	**1**
DMX footprint	**26 channels**
Beam angle	**25°**
Size (W × H × D)	**1000 × 1000 × 1000 mm**
GDTF fixture type	**0EAE88CB-DFBD-4D4D-7C55-D…**

Controls

Extra LED colours · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

8P 26 channel — 26 ch

8P 26 channel

26 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–254 Closed 255–255 Open
2	White	178	
3	Color Add RY	255	
4	Shutter1Strobe	0	
5	White	178	
6	Color Add RY	255	
7	Shutter1Strobe	0	
8	White	178	
9	Color Add RY	255	
10	Shutter1Strobe	0	
11	White	178	
12	Color Add RY	255	
13	Shutter1Strobe	0	
14	White	178	
15	Color Add RY	255	
16	Shutter1Strobe	0	
17	White	178	
18	Color Add RY	255	
19	Shutter1Strobe	0	
20	White	178	
21	Color Add RY	255	
22	Shutter1Strobe	0	
23	White	178	
24	Color Add RY	255	
25	Shutter1Strobe	0	
26	Control1	1	8–15 Reset Dimmer 16–23 Red shift on 24–31 Redshift off 32–39 S-curve dimmer 40–47 Linear dimmer 48–55 Square dimmer 56–63 Inverse square dimmer 64–71 Dim mode off 72–79 Dim mode 1 (fast) 80–87 Dim mode 2 88–95 Dim mode 3 (slow) 96–255 Re-adress pods