
Chauvet Professional

Well Gobo

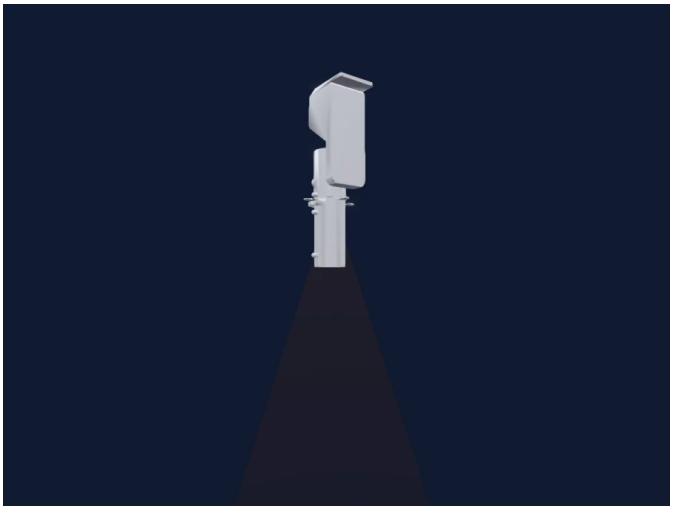

Manufacturer	**Chauvet Professional**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**1, 2, 3, 6 channels**
Beam angle	**36.6°**
Size (W × H × D)	**124 × 227 × 88 mm**
GDTF fixture type	**C9975BA1-B21A-11EB-8342-52…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1Ch Mode	1 ch
2Ch Mode	2 ch
3Ch Mode	3 ch
6Ch Mode	6 ch

1Ch Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max

2Ch Mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer

3Ch Mode

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–10 Shutter Open - Shutter Open 11–255 Strobe S > F - Strobe

6Ch Mode

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	1	0–10 Shutter Open - Shutter Open 11–255 Strobe S > F - Strobe
4	Effect	0	0–70 No Function - Custom 71–130 Auto Program 1 - Macro 131–190 Auto Program 2 - Macro 191–255 Auto Program 3 - Macro
5	Effect Speed	0	0–0 Min 1–254 Min > Max 255–255 Max
6	Intensity MSpeed	0	0–51 Preset Dim Speed Disp Menu 52–101 Dim Speed Mode Off 102–152 Dim Speed Mode 1 153–203 Dim Speed Mode 2 204–255 Dim Speed Mode 3