
Chauvet Professional

WELL STX 360

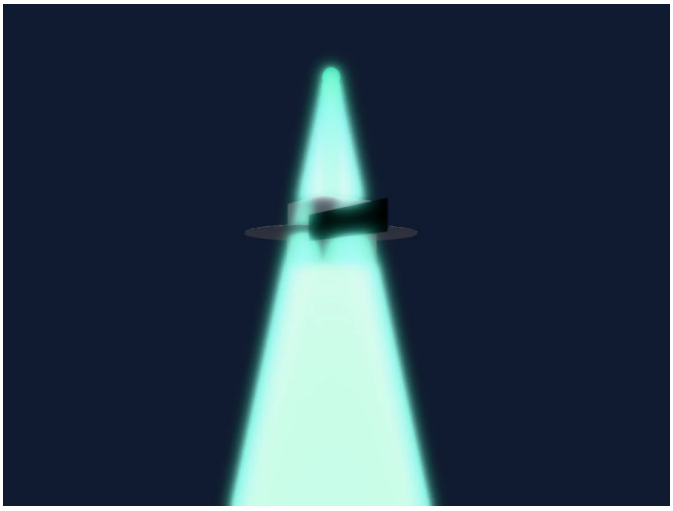

Manufacturer	**Chauvet Professional**
Type	**LED bar**
DMX modes	**1**
DMX footprint	**15 channels**
Beam angle	**25°**
Size (W × H × D)	**160 × 1 × 160 mm**
GDTF fixture type	**9E6372C5-451F-40FD-AD5B-65…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

15ch 15 ch

15ch

15 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Color Add WW	255	
6	C TC	0	0–5 No function 6–12 2800K 13–19 2900K 20–26 3000K 27–33 3100K 34–40 3200K 41–47 3300K 48–54 3400K 55–61 3500K 62–68 3600K 69–75 3700K 76–82 3800K 83–89 3900K 90–96 4000K 97–103 4100K 104–110 4200K 111–117 4300K 118–124 4400K 125–131 4500K 132–138 4600K 139–145 4700K 146–152 4800K 153–159 4900K 160–166 5000K 167–173 5100K 174–180 5200K 181–187 5300K 188–194 5400K 195–201 5500K 202–208 5600K 209–215 5700K 216–222 6000K 223–229 6500K 230–236 7000K 237–243 7500K 244–255 8000K
7	Shutter / Strobe	0	0–10 No function 11–255 Strobe slow to fast

15ch (continued)

Ch	Function	Default	DMX values
8	Effect	0	0–10 No function 11–18 Program 1 19–26 Program 2 27–34 Program 3 35–42 Program 4 43–50 Program 5 51–58 Program 6 59–66 Program 7 67–74 Program 8 75–82 Program 9 83–90 Program 10 91–98 Program 11 99–106 Program 12 107–114 Program 13 115–122 Program 14 123–130 Program 15 131–138 Program 16 139–146 Program 17 147–154 Program 18 155–162 Program 19 163–170 Program 20 171–178 Program 21 179–186 Program 22 187–194 Program 23 195–202 Program 24 203–210 Program 25 211–218 Program 26 219–226 Program 27 227–255 Program 28 (cycles through programs 1-27)
9	Effect Speed	191	
10	Dimmer Foreground	0	0–254 Closed 255–255 Open
11	Color Wheel	0	0–13 Red (wheel slot 1) 14–27 Green (wheel slot 2) 28–42 Blue (wheel slot 3) 43–56 White (wheel slot 4) 57–70 Green + blue (wheel slot 5) 71–84 Red + blue (wheel slot 6) 85–99 Red + green (wheel slot 7) 100–113 Red + green + blue (wheel slot 8) 114–127 Red + white (wheel slot 9) 128–141 Green + white (wheel slot 10) 142–155 Blue + white (wheel slot 11) 156–170 Red + green + white (wheel slot 12) 171–184 Red + blue + white (wheel slot 13) 185–198 Green + blue + white (wheel slot 14) 199–212 Red + green + blue + white (wheel slot 15) 213–227 2800K (wheel slot 16) 228–241 7000K (wheel slot 17) 242–255 Auto (wheel slot 18)
12	Dimmer Background	0	0–254 Closed 255–255 Open

15ch (continued)

Ch	Function	Default	DMX values
13	Color Wheel 2	0	0–13 Red (wheel slot 1) 14–27 Green (wheel slot 2) 28–42 Blue (wheel slot 3) 43–56 White (wheel slot 4) 57–70 Green + blue (wheel slot 5) 71–84 Red + blue (wheel slot 6) 85–99 Red + green (wheel slot 7) 100–113 Red + green + blue (wheel slot 8) 114–127 Red + white (wheel slot 9) 128–141 Green + white (wheel slot 10) 142–155 Blue + white (wheel slot 11) 156–170 Red + green + white (wheel slot 12) 171–184 Red + blue + white (wheel slot 13) 185–198 Green + blue + white (wheel slot 14) 199–212 Red + green + blue + white (wheel slot 15) 213–227 2800K (wheel slot 16) 228–241 7000K (wheel slot 17) 242–255 Auto (wheel slot 18)
14	Control1	0	0–51 Preset dimmer speed from display menu 52–101 Dimmer speed mode off 102–152 Dimmer speed mode 1 (fastest) 153–203 Dimmer speed mode 2 204–255 Dimmer speed mode 3 (slowest)
15	Effects1Fade	0	