
Chauvet

SlimPAR Pro Q USB

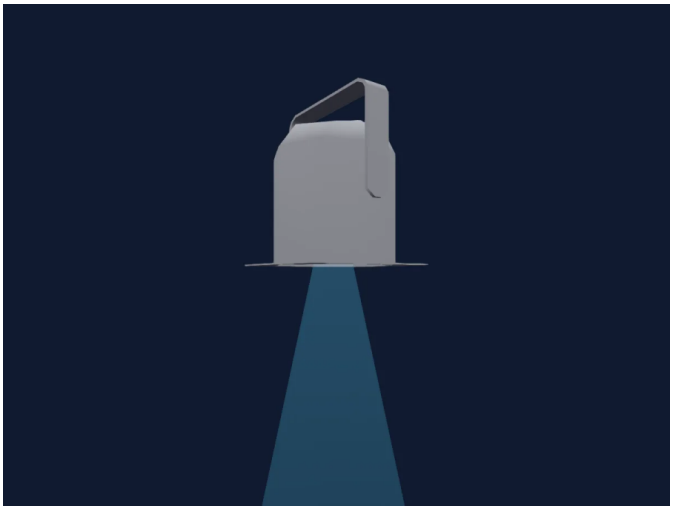

Manufacturer	**Chauvet**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 5, 10 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**96397D34-FFF1-419F-96DC-A8…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

4 Channel	4 ch
5 Channel	5 ch
10-Channel	10 ch

4 Channel

4 channels

Ch	Function	Default	DMX values
1	Color RGBRed	255	
2	Color RGBGreen	255	
3	Color RGBBlue	255	
4	Color Add RY	255	

5 Channel

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	255	
3	Color RGBGreen	255	
4	Color RGBBlue	255	
5	Color Add RY	255	

10-Channel

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	255	
3	Color RGBGreen	255	
4	Color RGBBlue	255	
5	Color Add RY	255	
6	Color Macro1	0	
7	Shutter1Strobe	0	0–10 Strobe Default 11–255 Strobe
8	Color Effects1	0	32–69 Auto Program 1 70–106 Auto Program 2 107–143 Auto Program 3 144–180 Auto Program 4 181–255 Sound active mode 1
9	Color Macro1Rate	0	
10	Dimmer Curve	0	0–51 Dimmer speed set from display 52–101 Dimmer speed mode off 102–152 Dimmer speed mode 1 (fast) 153–203 Dimmer speed mode 2 (medium) 204–255 Dimmer speed mode 3 (slow)