
China

2-Lite Blinder LED WW_CW

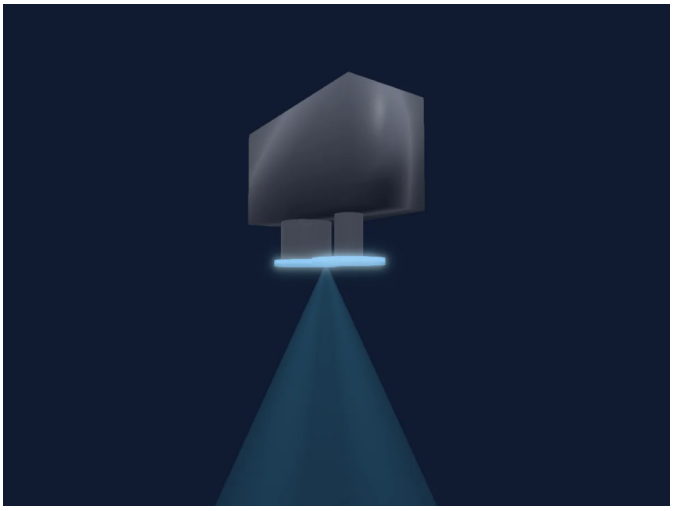

Manufacturer	**China**
Type	**Blinder**
DMX modes	**1**
DMX footprint	**8 channels**
Beam angle	**25-75°**
Size (W × H × D)	**550 × 300 × 250 mm**
GDTF fixture type	**8C6E9144-E965-44E1-8787-254…**

Controls

Extra LED colours · Colour wheel · Strobe · Dimmer

DMX modes

8 Channel — 8 ch

8 Channel

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–10 Open 11–126 Strobe · > 1–9.95 Hz 127–254 Strobe · >> 10–19.9 Hz 255–255 Strobe · >>> 20 Hz
3	Color Mix Mode	0	0–39 No function 40–79 Color jump 80–119 Color gradient 120–159 Color pulse change 160–199 Color mutation 200–239 Automatic mode 240–255 Sound mode
4	Color Mix MSpeed	0	
5	Color Add WW	255	
6	Color Add CW	255	
7	Color Add WW	255	
8	Color Add CW	255	