
Chroma-Q

Color Force II 72 Plus

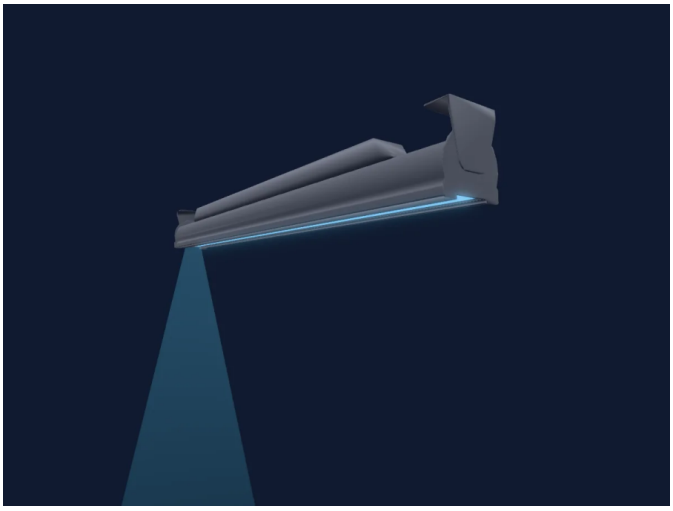

Manufacturer	**Chroma-Q**
Type	**PAR**
DMX modes	**145**
DMX footprint	**1, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14, 15, 16, 17, 18, 19, 20, 22, 23, 24,**
Beam angle	**26°**
Heads / cells	**13**
Size (W × H × D)	**1769 × 136 × 139 mm**
GDTF fixture type	**D468A91C-4E1B-11EF-B3CE-52…**

Controls

Extra LED colours · Hue and saturation · RGB colour mixing · Strobe · Dimmer · Pixel control

DMX modes

Look Sel	1 ch
HSIx1 Strobe Off	3 ch
HSIx1 Strobe On	3 ch
HSIx24 Strobe Off	3 ch
RGBx1 Strobe Off	3 ch
RGBx1 Strobe On	3 ch
RGBx24 Strobe Off	3 ch
RGBA x1 Strobe On	4 ch
RGBAx1 Strobe Off	4 ch
RGBAx24 Strobe Off	4 ch
HSIx1 Strobe On Top	5 ch
HSIx24Strobe On	5 ch
RGBx1 Strobe On Top	5 ch
RGBx24 Strobe On	5 ch
HSI Od Ev Strobe Off	6 ch
HSIx1 Strobe Random	6 ch
HSIx12 Strobe Off	6 ch
RGB Od Ev Strobe Off	6 ch
RGBAx1 Strobe On Top	6 ch
RGBAx24 Strobe On	6 ch
RGBx1 Strobe Random	6 ch
RGBx12 Strobe Off	6 ch
RGBAx1 Strobe Random	7 ch
HSI OdEv Strobe On	8 ch
HSIx12 Strobe On	8 ch
HSIx24 Strobe On Top	8 ch
RGB OdEv Strobe On	8 ch

RGBA Od Ev Strobe Off	8 ch
RGBAx12 Strobe Off	8 ch
RGBx12 Strobe On	8 ch
RGBx24 Strobe On Top	8 ch
HSI Skp2 Strobe Off	9 ch
HSIx24 Strobe Random	9 ch
HSIx8 Strobe Off 1	9 ch
RGB Skp2 Strobe Off	9 ch
RGBx24 Strobe Random	9 ch
RGBx8 Strobe Off	9 ch
RGBA OdEv Strobe On	10 ch
RGBAx12 Strobe On	10 ch
RGBAx24 Strobe On Top	10 ch
HSI Od Ev Strobe On Top	11 ch
HSI Skp2 Strobe On	11 ch
HSIx12 Strobe On Top	11 ch
HSIx8 Strobe Off	11 ch
RGB Od Ev Strobe On Top	11 ch
RGB Skp2 Strobe On	11 ch
RGB x8 Strobe On	11 ch
RGBAx12 Strobe On Top	11 ch
RGBAx24 Strobe Random	11 ch
HSI Od Ev Strobe Random	12 ch
HSI Skp3 Strobe Off	12 ch
HSIx12 Strobe Random	12 ch
HSIx6 Strobe Off	12 ch
RGB Od Ev Strobe Random	12 ch
RGB skp3 Strobe Off	12 ch
RGBA Skp2 Strobe Off	12 ch
RGBAx8 Strobe Off	12 ch
RGBx12 Strobe Random	12 ch
RGBx6 Strobe Off	12 ch
HSI Skp2 Strobe On Top	14 ch
HSI Skp3 Strobe On	14 ch
HSIx6 Strobe On	14 ch
HSIx8 Strobe On Top	14 ch
RGB Skp2 Strobe On Top	14 ch
RGB Skp3 Strobe On	14 ch
RGBA Od Ev Strobe On Top	14 ch
RGBA Skp2 Strobe On	14 ch
RGBA x8 Strobe On	14 ch
RGBAx12 Strobe On Top 1	14 ch
RGBx6 Strobe On	14 ch
RGBx8 Strobe On Top	14 ch
HSI Skp2 Strobe Random	15 ch
HSIx8 Strobe Random	15 ch
RGB Skp2 Strobe Random	15 ch
RGBA Od Ev Strobe Random	15 ch
RGBAx12 Strobe Random	15 ch
RGBx8 Strobe Random	15 ch
RGBA Skp3 Strobe Off	16 ch

RGBAx6 Strobe Off	16 ch
HSI Skp3 Strobe On Top	17 ch
HSIx6 Strobe On Top	17 ch
RGB Skp3 Strobe On Top	17 ch
RGBx6 Strobe On Top	17 ch
HSI Skp3 Strobe Random	18 ch
HSI Skp6 Strobe Off	18 ch
HSIx4 Strobe Off	18 ch
HSIx6 Strobe Random	18 ch
RGB Skp3 Strobe Random	18 ch
RGB Skp6 Strobe Off	18 ch
RGBA Skp2 Strobe On Top	18 ch
RGBA Skp3 Strobe On	18 ch
RGBAx6 Strobe On	18 ch
RGBAx8 Strobe On Top	18 ch
RGBx4 Strobe Off	18 ch
RGBx6 Strobe Random	18 ch
RGBA Skp2 Strobe Random	19 ch
RGBAx8 Strobe Random	19 ch
HSI Skp6 Strobe On	20 ch
HSIx4 Strobe On	20 ch
RGB Skp6 Strobe On	20 ch
RGB x4 Strobe On	20 ch
RGBA Skp3 Strobe On Top	22 ch
RGBAx6 Strobe On Top	22 ch
HSI Skp6 Strobe On Top	23 ch
HSIx4 Strobe On Top	23 ch
RGB Skp6 Strobe On Top	23 ch
RGBA Skp3 Strobe Random	23 ch
RGBAx6 Strobe Random	23 ch
RGBx4 Strobe On Top	23 ch
HSI Skp6 Strobe Random	24 ch
HSIx3 Strobe Off	24 ch
HSIx4 Strobe Rabdom	24 ch
RGB Skp6 Strobe Random	24 ch
RGBA Skp6 Strobe Off	24 ch
RGBAx4 Strobe Off	24 ch
RGBx3 Strobe Off	24 ch
RGBx4 Strobe Random	24 ch
HSI x3 Strobe On	26 ch
RGB x3 Strobe On	26 ch
RGBA Skp6 Strobe On	26 ch
RGBA x4 Strobe On	26 ch
HSIx3 Strobe On Top 1	29 ch
RGBx3 Strobe On Top	29 ch
HSIx3 Strobe On Top	30 ch
RGBA Skp6 Strobe On Top	30 ch
RGBAx4 Strobe On Top	30 ch
RGBx3 Strobe Random	30 ch
RGBA Skp6 Strobe Random	31 ch
RGBAx4 Strobe Random	31 ch

RGBAx3 Strobe Off	32 ch
RGBA x3 Strobe On	34 ch
HSIx2 Strobe Off	36 ch
RGBx2 Strobe Off	36 ch
HSI x2 Strobe On	38 ch
RGB x2 Strobe On	38 ch
RGBAx3 Strobe On Top	38 ch
RGBAx3 Strobe Random	39 ch
HSIx2 Strobe On Top	41 ch
RGBx2 Strobe On Top	41 ch
HSIx2 Strobe Random	42 ch
RGBx2 Strobe Random	42 ch
RGBAx2 Strobe Off	48 ch
RGBAx2 Strobe On	50 ch
RGBAx2 Strobe On Top	54 ch
RGBAx2 Strobe Random	55 ch

Look Sel

1 channel

Ch	Function	Default	DMX values
1	Function	0	0–0 Off - Macro 1–8 Red Full - Macro (wheel slot 1) 9–16 Pink Full - Macro (wheel slot 2) 17–24 Orange Full - Macro (wheel slot 3) 25–32 Light Orange Full - Macro (wheel slot 4) 33–40 Yellow Full - Macro (wheel slot 5) 41–48 Light Yellow Full - Macro (wheel slot 6) 49–56 Green Full - Macro (wheel slot 7) 57–64 Light Green Full - Macro (wheel slot 8) 65–72 Cyan Full - Macro (wheel slot 9) 73–80 Light Cyan Full - Macro (wheel slot 10) 81–88 Blue Full - Macro (wheel slot 11) 89–96 Light Blue Full - Macro (wheel slot 12) 97–104 2800 White - Macro 105–112 3200 White - Macro 113–120 4000 White - Macro 121–128 5600 White - Macro 129–255 Empty - Custom

HSIx1 Strobe Off

3 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx1 Strobe On

3 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx24 Strobe Off

3 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx24 Strobe Off (continued)

Ch	Function	Default	DMX values
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx1 Strobe Off

3 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx1 Strobe On

3 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx24 Strobe Off

3 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x1 Strobe On

4 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x1 Strobe On (continued)

Ch	Function	Default	DMX values
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx1 Strobe Off

4 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx24 Strobe Off

4 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx1 Strobe On Top

5 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx1 Strobe On Top (continued)

Ch	Function	Default	DMX values
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx24Strobe On

5 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx1 Strobe On Top

5 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx24 Strobe On

5 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx24 Strobe On (continued)

Ch	Function	Default	DMX values
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI Od Ev Strobe Off

6 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx1 Strobe Random

6 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx12 Strobe Off

6 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Od Ev Strobe Off

6 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx1 Strobe On Top

6 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx1 Strobe On Top (continued)

Ch	Function	Default	DMX values
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx24 Strobe On

6 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx1 Strobe Random

6 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx12 Strobe Off

6 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx1 Strobe Random

7 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI OdEv Strobe On

8 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI OdEv Strobe On (continued)

Ch	Function	Default	DMX values
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx12 Strobe On

8 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx24 Strobe On Top

8 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz

HSIx24 Strobe On Top (continued)

Ch	Function	Default	DMX values
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB OdEv Strobe On

8 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Od Ev Strobe Off

8 channels

Ch	Function	Default	DMX values

RGBA Od Ev Strobe Off (continued)

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx12 Strobe Off

8 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx12 Strobe On

8 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx24 Strobe On Top

8 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp2 Strobe Off

9 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx24 Strobe Random

9 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx24 Strobe Random (continued)

Ch	Function	Default	DMX values
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx8 Strobe Off 1

9 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe Off

9 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe Off (continued)

Ch	Function	Default	DMX values
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx24 Strobe Random

9 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx8 Strobe Off

9 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx8 Strobe Off (continued)

Ch	Function	Default	DMX values
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA OdEv Strobe On

10 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx12 Strobe On

10 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx24 Strobe On Top

10 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx24 Strobe On Top (continued)

Ch	Function	Default	DMX values
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Od Ev Strobe On Top

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp2 Strobe On

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz

HSI Skp2 Strobe On (continued)

Ch	Function	Default	DMX values
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx12 Strobe On Top

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx12 Strobe On Top (continued)

Ch	Function	Default	DMX values
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx8 Strobe Off

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Od Ev Strobe On Top

11 channels

Ch	Function	Default	DMX values

RGB Od Ev Strobe On Top (continued)

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe On

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe On (continued)

Ch	Function	Default	DMX values
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB x8 Strobe On

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx12 Strobe On Top

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx24 Strobe Random

11 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx24 Strobe Random (continued)

Ch	Function	Default	DMX values
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Od Ev Strobe Random

12 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe Off

12 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx12 Strobe Random

12 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx12 Strobe Random (continued)

Ch	Function	Default	DMX values
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe Off

12 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe Off (continued)

Ch	Function	Default	DMX values
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Od Ev Strobe Random

12 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB skp3 Strobe Off

12 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB skp3 Strobe Off (continued)

Ch	Function	Default	DMX values
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe Off

12 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe Off (continued)

Ch	Function	Default	DMX values
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx8 Strobe Off

12 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx8 Strobe Off (continued)

Ch	Function	Default	DMX values
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx12 Strobe Random

12 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx6 Strobe Off

12 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx6 Strobe Off (continued)

Ch	Function	Default	DMX values
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp2 Strobe On Top

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp2 Strobe On Top (continued)

Ch	Function	Default	DMX values
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe On

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe On (continued)

Ch	Function	Default	DMX values
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe On

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe On (continued)

Ch	Function	Default	DMX values
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx8 Strobe On Top

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe On Top

14 channels

Ch	Function	Default	DMX values

RGB Skp2 Strobe On Top (continued)

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp3 Strobe On

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp3 Strobe On (continued)

Ch	Function	Default	DMX values
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Od Ev Strobe On Top

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Od Ev Strobe On Top (continued)

Ch	Function	Default	DMX values
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe On

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe On (continued)

Ch	Function	Default	DMX values
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x8 Strobe On

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x8 Strobe On (continued)

Ch	Function	Default	DMX values
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx12 Strobe On Top 1

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx6 Strobe On

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx8 Strobe On Top

14 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx8 Strobe On Top (continued)

Ch	Function	Default	DMX values
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp2 Strobe Random

15 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp2 Strobe Random (continued)

Ch	Function	Default	DMX values
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx8 Strobe Random

15 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx8 Strobe Random (continued)

Ch	Function	Default	DMX values
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe Random

15 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp2 Strobe Random (continued)

Ch	Function	Default	DMX values
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Od Ev Strobe Random

15 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Od Ev Strobe Random (continued)

Ch	Function	Default	DMX values
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx12 Strobe Random

15 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx12 Strobe Random (continued)

Ch	Function	Default	DMX values
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx8 Strobe Random

15 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe Off

16 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe Off

16 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe Off (continued)

Ch	Function	Default	DMX values
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe On Top

17 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe On Top (continued)

Ch	Function	Default	DMX values
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe On Top

17 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe On Top (continued)

Ch	Function	Default	DMX values
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp3 Strobe On Top

17 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp3 Strobe On Top (continued)

Ch	Function	Default	DMX values
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx6 Strobe On Top

17 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx6 Strobe On Top (continued)

Ch	Function	Default	DMX values
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe Random

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp3 Strobe Random (continued)

Ch	Function	Default	DMX values
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe Off

18 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe Off (continued)

Ch	Function	Default	DMX values
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe Off

18 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx6 Strobe Random

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp3 Strobe Random

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe Off

18 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe On Top

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe On

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe On

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx8 Strobe On Top

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx4 Strobe Off

18 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx6 Strobe Random

18 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe Random

19 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp2 Strobe Random (continued)

Ch	Function	Default	DMX values
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx8 Strobe Random

19 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx8 Strobe Random (continued)

Ch	Function	Default	DMX values
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe On

20 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe On (continued)

Ch	Function	Default	DMX values
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe On

20 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe On (continued)

Ch	Function	Default	DMX values
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe On

20 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe On (continued)

Ch	Function	Default	DMX values
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB x4 Strobe On

20 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB x4 Strobe On (continued)

Ch	Function	Default	DMX values
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe On Top

22 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe On Top (continued)

Ch	Function	Default	DMX values
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe On Top (continued)

Ch	Function	Default	DMX values
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe On Top

22 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe On Top (continued)

Ch	Function	Default	DMX values
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe On Top

23 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe On Top (continued)

Ch	Function	Default	DMX values
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe On Top

23 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe On Top (continued)

Ch	Function	Default	DMX values
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe On Top (continued)

Ch	Function	Default	DMX values
23	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe On Top

23 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe On Top (continued)

Ch	Function	Default	DMX values
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe Random

23 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp3 Strobe Random (continued)

Ch	Function	Default	DMX values
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe Random

23 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe Random (continued)

Ch	Function	Default	DMX values
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx6 Strobe Random (continued)

Ch	Function	Default	DMX values
23	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx4 Strobe On Top

23 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx4 Strobe On Top (continued)

Ch	Function	Default	DMX values
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe Random

24 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI Skp6 Strobe Random (continued)

Ch	Function	Default	DMX values
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe Off

24 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe Off (continued)

Ch	Function	Default	DMX values
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe Off (continued)

Ch	Function	Default	DMX values
22	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe Rabdom

24 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx4 Strobe Rabdom (continued)

Ch	Function	Default	DMX values
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe Random

24 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB Skp6 Strobe Random (continued)

Ch	Function	Default	DMX values
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe Off

24 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
17	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe Off (continued)

Ch	Function	Default	DMX values
19	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe Off

24 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe Off (continued)

Ch	Function	Default	DMX values
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
17	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe Off

24 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe Off (continued)

Ch	Function	Default	DMX values
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe Off (continued)

Ch	Function	Default	DMX values
23	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx4 Strobe Random

24 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx4 Strobe Random (continued)

Ch	Function	Default	DMX values
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI x3 Strobe On

26 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI x3 Strobe On (continued)

Ch	Function	Default	DMX values
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB x3 Strobe On

26 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB x3 Strobe On (continued)

Ch	Function	Default	DMX values
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe On

26 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe On (continued)

Ch	Function	Default	DMX values
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x4 Strobe On

26 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x4 Strobe On (continued)

Ch	Function	Default	DMX values
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe On Top 1

29 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe On Top 1 (continued)

Ch	Function	Default	DMX values
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
27	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe On Top 1 (continued)

Ch	Function	Default	DMX values
28	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
29	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe On Top

29 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe On Top (continued)

Ch	Function	Default	DMX values
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe On Top

30 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe On Top (continued)

Ch	Function	Default	DMX values
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx3 Strobe On Top (continued)

Ch	Function	Default	DMX values
22	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
27	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
28	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
29	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
30	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe On Top

30 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe On Top (continued)

Ch	Function	Default	DMX values
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe On Top (continued)

Ch	Function	Default	DMX values
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe On Top

30 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe On Top (continued)

Ch	Function	Default	DMX values
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe Random

30 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx3 Strobe Random (continued)

Ch	Function	Default	DMX values
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe Random

31 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe Random (continued)

Ch	Function	Default	DMX values
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA Skp6 Strobe Random (continued)

Ch	Function	Default	DMX values
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe Random

31 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe Random (continued)

Ch	Function	Default	DMX values
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx4 Strobe Random (continued)

Ch	Function	Default	DMX values
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe Off

32 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe Off (continued)

Ch	Function	Default	DMX values
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
17	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
25	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
29	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe Off (continued)

Ch	Function	Default	DMX values
32	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x3 Strobe On

34 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBA x3 Strobe On (continued)

Ch	Function	Default	DMX values
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
31	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe Off

36 channels

Ch	Function	Default	DMX values
1	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
2	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe Off (continued)

Ch	Function	Default	DMX values
19	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
27	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
28	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
29	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
30	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
31	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
32	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
33	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
34	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
35	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
36	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe Off

36 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe Off (continued)

Ch	Function	Default	DMX values
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSI x2 Strobe On

38 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI x2 Strobe On (continued)

Ch	Function	Default	DMX values
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
27	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
28	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
29	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
30	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
31	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
32	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
33	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
34	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
35	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
36	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max

HSI x2 Strobe On (continued)

Ch	Function	Default	DMX values
37	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
38	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGB x2 Strobe On

38 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB x2 Strobe On (continued)

Ch	Function	Default	DMX values
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGB x2 Strobe On (continued)

Ch	Function	Default	DMX values
34	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe On Top

38 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe On Top (continued)

Ch	Function	Default	DMX values
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe On Top (continued)

Ch	Function	Default	DMX values
31	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
35	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe Random

39 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe Random (continued)

Ch	Function	Default	DMX values
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx3 Strobe Random (continued)

Ch	Function	Default	DMX values
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
32	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
36	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe On Top

41 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
6	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
13	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
24	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
27	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
28	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
29	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
30	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
31	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
32	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
33	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
34	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
35	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
36	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
37	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
38	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
39	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
40	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
41	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe On Top

41 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
19	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
37	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
40	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
41	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe Random

42 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
5	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
6	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
7	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
8	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
9	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
10	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
11	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
12	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe Random (continued)

Ch	Function	Default	DMX values
13	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
14	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
15	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
16	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
18	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
19	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
21	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
22	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
24	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
25	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
26	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
27	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
28	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
29	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
30	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

HSIx2 Strobe Random (continued)

Ch	Function	Default	DMX values
31	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
32	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
33	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
34	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
35	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
36	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
37	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
38	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
39	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max
40	H SBHue	0	0–0 Min 1–254 Min > Max 255–255 Max
41	H SBSaturation	0	0–0 Min 1–254 Min > Max 255–255 Max
42	H SBBrightness	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe Random

42 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe Random (continued)

Ch	Function	Default	DMX values
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe Random (continued)

Ch	Function	Default	DMX values
24	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
40	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
41	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBx2 Strobe Random (continued)

Ch	Function	Default	DMX values
42	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Off

48 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Off (continued)

Ch	Function	Default	DMX values
17	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
21	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
25	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
29	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
33	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Off (continued)

Ch	Function	Default	DMX values
35	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
37	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
40	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
41	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
42	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
43	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
44	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
45	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
46	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
47	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
48	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On

50 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On (continued)

Ch	Function	Default	DMX values
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On (continued)

Ch	Function	Default	DMX values
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
31	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
35	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
39	Red	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On (continued)

Ch	Function	Default	DMX values
40	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
41	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
42	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
43	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
44	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
45	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
46	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
47	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
48	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
49	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
50	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On Top

54 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
25	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
27	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
31	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
35	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
39	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
40	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
41	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
42	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe On Top (continued)

Ch	Function	Default	DMX values
43	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
44	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
45	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
46	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
47	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
48	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
49	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
50	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
51	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
52	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
53	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
54	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Random

55 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–0 STROBE · Min 0.1 Hz 1–254 STROBE · Min > Max 0.178–19.9 Hz 255–255 STROBE · Max 20 Hz
2	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Shutter1Strobe Random	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Random (continued)

Ch	Function	Default	DMX values
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Random (continued)

Ch	Function	Default	DMX values
24	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
28	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
32	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
36	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
40	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
41	Green	255	0–0 Min 1–254 Min > Max 255–255 Max

RGBAx2 Strobe Random (continued)

Ch	Function	Default	DMX values
42	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
43	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
44	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
45	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
46	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
47	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
48	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
49	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
50	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
51	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
52	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
53	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
54	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
55	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max