
Chroma-Q

Space Force OnebyTwo

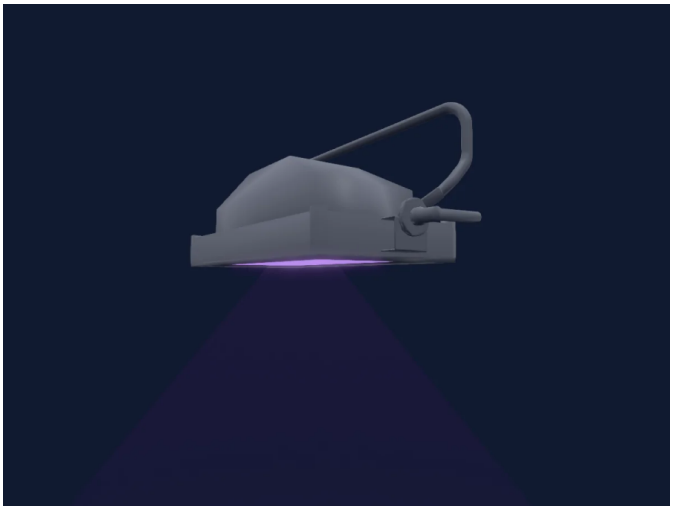

Manufacturer	**Chroma-Q**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**2, 3 channels**
Beam angle	**80°**
Size (W × H × D)	**793 × 249 × 144 mm**
GDTF fixture type	**B9346743-F835-11EC-A965-525…**

Controls

Colour temperature · Dimmer

DMX modes

INT-CCT	2 ch
INT-CCT-EXTD	3 ch

INT-CCT

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	C TC	128	0–0 Min 1–254 Min > Max 255–255 Max

INT-CCT-EXTD

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	C TC	128	0–0 Min 1–254 Min > Max 255–255 Max
3	Control1	0	0–2 No Function - Custom 3–10 Reserved - Custom 11–12 Fade Off - Custom 13–14 Fade On - Custom 15–70 Reserved - Custom 71–72 PWM 750 - Custom 73–74 PWM 1500 - Custom 75–76 PWM 3000 - Custom 77–78 PWM 6000 - Custom 79–80 PWM 12000 - Custom 81–82 PWM 24000 - Custom 83–84 PWM 48000 - Custom 85–86 PWM 96000 - Custom 87–140 Reserved - Custom 141–142 Enable RDM Function - Custom 143–144 Disable RDM Function - Custom 145–150 Reserved - Custom 151–152 DMX Lost Fx Stay To The Last State - Custom 153–154 DMX Lost Fx Goes Back - Custom 155–156 No Function - Custom 157–158 DMX Lost Fx To Selected Look - Custom 159–243 Reserved - Custom 244–245 Save As User Defaults - Custom 246–247 Restore User Defaults - Custom 248–249 Restore Default Setting - Custom 250–255 No Function - Custom