
CKC Lighting

Blinder WW2

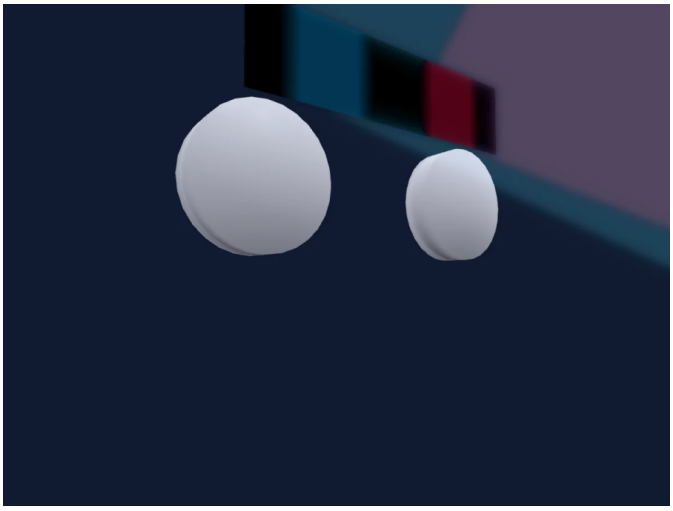

Manufacturer	**CKC Lighting**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**1, 2, 3, 4 channels**
Beam angle	**60°**
Size (W × H × D)	**486 × 293 × 182 mm**
GDTF fixture type	**AD396969-A2BD-4826-9B58-C9…**

Controls

Dimmer

DMX modes

1 Channel Mode	1 ch
2 Channel Mode	2 ch
3 Channel Mode	3 ch
4 Channel Mode 1	4 ch

1 Channel Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

2 Channel Mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Curve	0	0–41 Standard 42–84 Stage 85–127 TV 128–170 Architectural 171–213 Theatre 214–255 Default

3 Channel Mode

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	63	0–31 Closed 32–63 Open 64–95 Shutter1Strobe 2 96–127 Shutter1 3 128–159 Shutter1StrobePulse 4 160–191 Shutter1 5 192–223 Shutter1StrobeRandom 6 224–255 Shutter1 7
3	Dimmer Curve	0	0–41 Standard 42–84 Stage 85–127 TV 128–170 Architectural 171–213 Theatre 214–255 Default

4 Channel Mode 1

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Shutter / Strobe	63	0–31 Closed 32–63 Open 64–95 Shutter1Strobe 2 96–127 Shutter1 3 128–159 Shutter1StrobePulse 4 160–191 Shutter1 5 192–223 Shutter1StrobeRandom 6 224–255 Shutter1 7
4	Dimmer Curve	0	0–41 Standard 42–84 Stage 85–127 TV 128–170 Architectural 171–213 Theatre 214–255 Default