
CKC Lighting

Fresnel 60TW

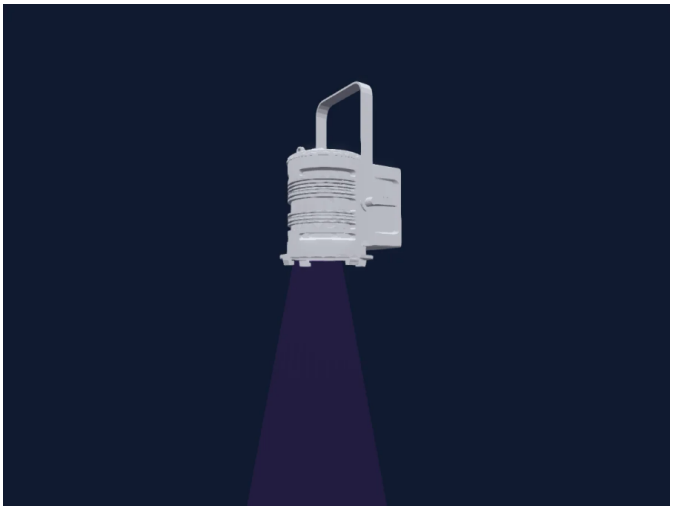

Manufacturer	**CKC Lighting**
Type	**Spot**
DMX modes	**2**
DMX footprint	**5, 7 channels**
Beam angle	**22°**
Size (W × H × D)	**160 × 190 × 50 mm**
GDTF fixture type	**46732E23-5767-465F-BDB6-D0…**

Controls

Extra LED colours · RGB colour mixing · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

5CH	5 ch
7CH	7 ch

5CH

5 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add CW	255	
5	Dimmer	0	0–254 0% 255–255 100%

7CH

7 channels

Ch	Function	Default	DMX values
1	Effect	0	1–99 Change effect slow 100–100 Change effect fast 101–199 Fade effect slow 200–200 Fade effect fast 201–254 Sound effect slow 255–255 Sound effect fast
2	Red	255	
3	Green	255	
4	Blue	255	
5	Color Add CW	255	
6	Dimmer Curve	0	0–30 Linear/LED 31–60 Linear/Halogen 61–90 Square/LED 91–120 Square/ Halogen 121–150 INV Squa/LED 151–180 INV Squa/Halogen 181–210 S-Curve /LED 211–255 S-Curve/Halogen
7	Dimmer	0	0–254 0% 255–255 100%