
EK Lights

Hex Par 12

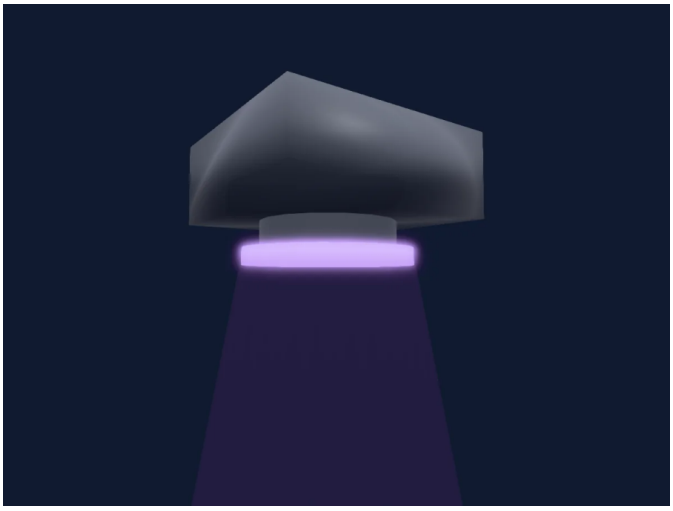

Manufacturer	**EK Lights**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**6, 11 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 98 × 250 mm**
GDTF fixture type	**B3C94955-E5F0-4284-BC08-9A…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

6 Channel Mode	6 ch
11 Channel Mode	11 ch

6 Channel Mode

6 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add RY	0	
5	White	0	
6	UV	0	

11 Channel Mode

11 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add RY	0	
5	White	0	
6	UV	0	
7	Color Macro1	0	0–15 Open 16–255 Colour Macros
8	Shutter / Strobe	0	0–15 Open 16–255 Strobe
9	Effect	0	0–31 No Function 32–63 Pulse Open 64–95 Pulse Closed 96–127 Pulse 128–159 Auto Fade 160–191 Auto Snap (7 colours) 192–223 Auto Snap (18 colours) 224–255 Sound Mode
10	Dimmer	0	0–253 Closed 254–255 Open
11	Dimmer Mode	0	0–51 From Menu 52–101 Dim Speed Mode Off 102–152 Dim Speed Mode Fast 153–203 Dim Speed Mode Mid 204–255 Dim Speed Mode Slow