
EK Lights

NITEC Pharos

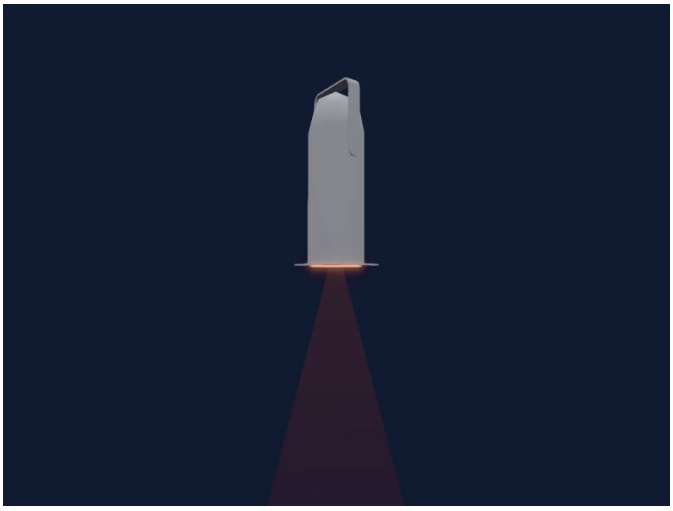

Manufacturer	**EK Lights**
Type	**Profile spot**
DMX modes	**2**
DMX footprint	**1, 3 channels**
Beam angle	**30°**
Size (W × H × D)	**185 × 230 × 40 mm**
GDTF fixture type	**4A7D401D-DCD5-49DA-8E0E-A…**

Controls

Dimmer

DMX modes

1 Channel Mode	1 ch
3 Channel Mode	3 ch

1 Channel Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

3 Channel Mode

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Strobe Rate	0	0–10 No Function 11–254 Strobe Slow 255–255 Strobe Fast
3	Dimmer Mode	0	0–51 Preset Speed from Display 52–101 Dimmer Speed Mode Off 102–152 Dimmer Speed Mode 1 (Fast) 153–203 Dimmer Speed Mode 2 (Medium) 204–255 Dimmer Speed Mode 3 (Slow)