
ETC

ColorSource Linear Pearl 4

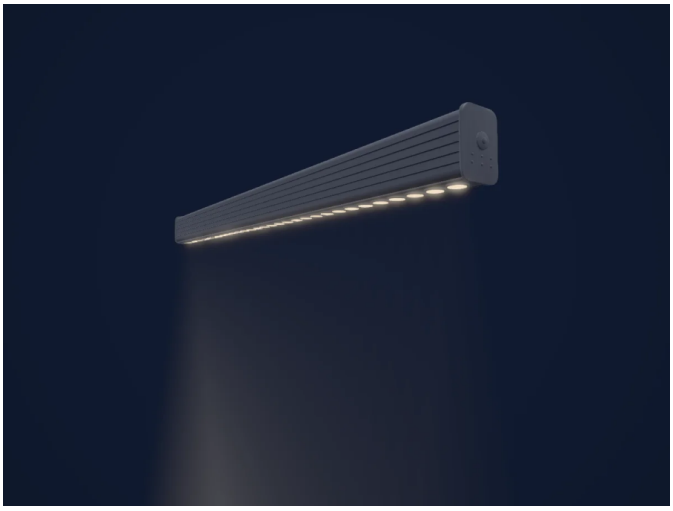

Manufacturer	**ETC**
Type	**PAR**
DMX modes	**6**
DMX footprint	**1, 2, 4, 8, 16 channels**
Beam angle	**15°**
Heads / cells	**4**
Size (W × H × D)	**1991 × 153 × 109 mm**
GDTF fixture type	**96BF961A-5973-5A66-AAF5-2B…**

Controls

Extra LED colours · Colour control · Colour temperature · Strobe · Dimmer

DMX modes

Group 1ch	1 ch
Group ct	2 ch
Cell 1ch	4 ch
Group dir	4 ch
Cell ct	8 ch
Cell dir	16 ch

Group 1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

Group ct

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	C TC	0	

Cell 1ch

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	

Group dir

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Add WW	0	
3	Color Add CW	0	
4	Shutter / Strobe	0	0–0 No strobe 1–254 Strobe 1-33 per second 1–33 Hz 255–255 No strobe

Cell ct

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	C TC	0	
3	Dimmer	0	
4	C TC	0	
5	Dimmer	0	
6	C TC	0	
7	Dimmer	0	
8	C TC	0	

Cell dir

16 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Add WW	0	
3	Color Add CW	0	
4	Shutter / Strobe	0	0–0 No strobe 1–254 Strobe 1-33 per second 1–33 Hz 255–255 No strobe
5	Dimmer	0	

Cell dir (continued)

Ch	Function	Default	DMX values
6	Color Add WW	0	
7	Color Add CW	0	
8	Shutter / Strobe	0	0–0 No strobe 1–254 Strobe 1-33 per second 1–33 Hz 255–255 No strobe
9	Dimmer	0	
10	Color Add WW	0	
11	Color Add CW	0	
12	Shutter / Strobe	0	0–0 No strobe 1–254 Strobe 1-33 per second 1–33 Hz 255–255 No strobe
13	Dimmer	0	
14	Color Add WW	0	
15	Color Add CW	0	
16	Shutter / Strobe	0	0–0 No strobe 1–254 Strobe 1-33 per second 1–33 Hz 255–255 No strobe

Fixture model: gdtf-etc-colorsource-linear-pearl-4-202611180614
Creator: HitLight
Modifications: Original HitLight 3D housing: scripted parametric geometry modelled by HitLight from public product photos and the manufactu...