
ETEC

LED Bar 183 RGB

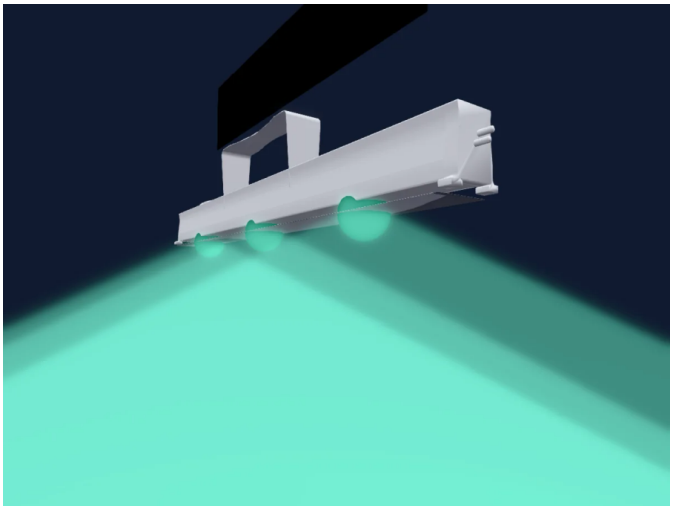

Manufacturer	**ETEC**
Type	**LED bar**
DMX modes	**3**
DMX footprint	**3, 7, 13 channels**
Beam angle	**126°**
Heads / cells	**3**
Size (W × H × D)	**346 × 165 × 70 mm**
GDTF fixture type	**95B54BF2-75C6-469E-9147-844…**

Controls

RGB colour mixing · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

Mode1 3Ch	3 ch
Mode2 7Ch	7 ch
Mode3 13CH	13 ch

Mode1 3Ch

3 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

Mode2 7Ch

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
6	Effect	10	0–9 Dimmer Manual 10–249 Effects 250–255 Music Input
7	Global MSpeed	0	

Mode3 13CH

13 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max

Mode3 13CH (continued)

Ch	Function	Default	DMX values
7	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Dummy	0	
11	Strobe Duration	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Effect	10	0–9 Dimmer Manual 10–249 Effects 250–255 Music Input
13	Global MSpeed	0	