
Eurolite

Hallucination

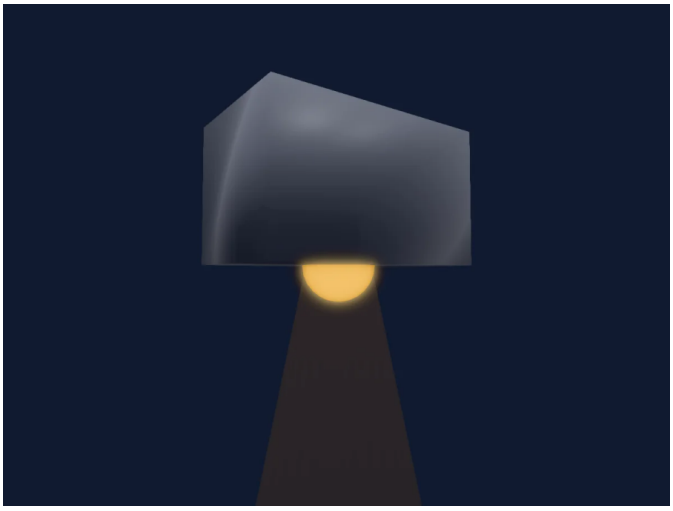

Manufacturer	**Eurolite**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**6 channels**
Size (W × H × D)	**308 × 186 × 199 mm**
GDTF fixture type	**7F9887A1-2948-48AB-97B7-45…**

Controls

Effect speed · Dimmer · Gobo rotation

Safety-relevant functions

Built-in effect programmes

DMX modes

6ch Mode — 6 ch

6ch Mode

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Strobe Frequency	32	0–31 Closed 32–63 Open 64–64 Strobe Slowest 65–94 Strobe S > F 95–95 Strobe Fastest 96–127 NoFeature 1 128–128 Pulse Slowest 129–158 Pulse S > F 159–159 Pulse Fastest 160–191 NoFeature 2 192–192 Random Slowest 193–222 Random S > F 223–223 Random Fastest 224–255 NoFeature 3
3	Gobo Rotation	0	0–127 Glass Manual Index 128–128 Glass CW F 129–190 Glass CW F > S 191–191 Glass CW S 192–192 Glass ACW S 193–254 Glass ACW S > F 255–255 Glass ACW F
4	Gobo Rotation	0	0–127 Mirror Manual Index 128–128 Mirror ACW F 129–190 Mirror ACW F > S 191–191 Mirror ACW S 192–192 Mirror CW S 193–254 Mirror CW S > F 255–255 Mirror CW F
5	Effect	0	0–3 Shows All Off 4–31 All Shows 32–59 Show 1 60–87 Show 2 88–115 Show 3 116–143 Show 4 144–171 Show 5 172–199 Show 6 200–227 Show 7 228–255 Show 8
6	Effect Speed	0	0–0 Show Speed S 1–254 Show Speed S > F 255–255 Show Speed F