
Eurolite

LED D-4000 Beam Effect

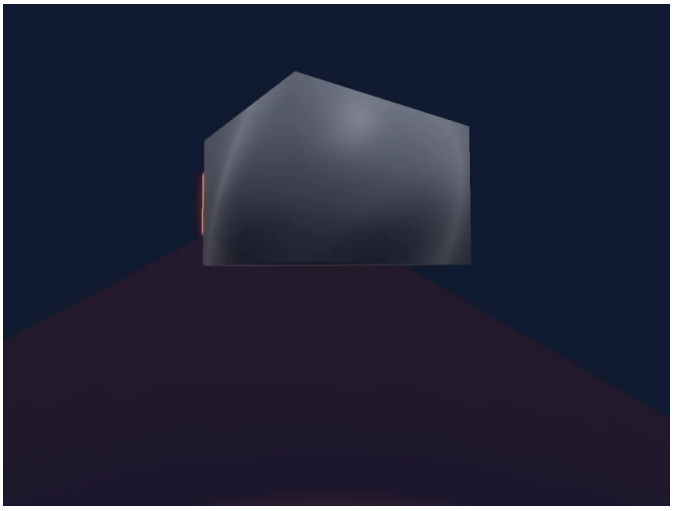

Manufacturer	**Eurolite**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**12 channels**
Beam angle	**120°**
Size (W × H × D)	**287 × 199 × 289 mm**
GDTF fixture type	**72596ED8-E683-4615-B971-23…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

12ch Mode	12 ch

12ch Mode

12 channels

Ch	Function	Default	DMX values
1	Effects1Pos Rotate	0	0–0 Fully ACW 1–128 Manual Angle 129–129 Fully CW 130–130 Slowest 131–254 S > F 255–255 Fastest
2	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Strobe Frequency	0	0–9 Open 10–10 Strobe Min 11–254 Strobe Min > Max 255–255 Strobe Max
4	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
6	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
7	White	0	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add C	0	0–0 Min 1–254 Min > Max 255–255 Max
9	Color Add RM	0	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add Y	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add RY	0	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Macro1	0	0–9 Auto Off 10–10 Auto 1 Min 11–39 Auto 1 S > F 40–40 Auto 2 Min 41–69 Auto 2 S > F 70–70 Auto 3 Min 71–99 Auto 3 S > F 100–100 Auto 4 Min 101–129 Auto 4 S > F 130–159 Sound 1 S > F 160–189 Sound 2 S > F 190–219 Sound 3 S > F 220–255 Sound 4 S > F