
Eurolite

LED PIX-144

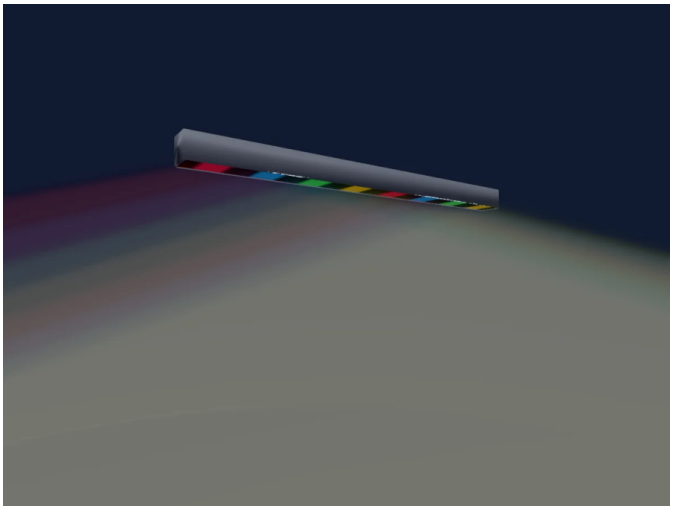

Manufacturer	**Eurolite**
Type	**PAR**
DMX modes	**2**
DMX footprint	**24, 48 channels**
Beam angle	**140°**
Heads / cells	**8**
Size (W × H × D)	**1010 × 60 × 62 mm**
GDTF fixture type	**2754D0E4-FBE4-4A35-BCFB-5B...**

Controls

Dimmer · Pixel control

DMX modes

MODE 24	24 ch
MODE 48	48 ch

MODE 24

24 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Red	0	
5	Green	0	
6	Blue	0	
7	Red	0	
8	Green	0	
9	Blue	0	
10	Red	0	
11	Green	0	
12	Blue	0	
13	Red	0	
14	Green	0	
15	Blue	0	
16	Red	0	
17	Green	0	
18	Blue	0	
19	Red	0	
20	Green	0	
21	Blue	0	
22	Red	0	
23	Green	0	
24	Blue	0	

MODE 48

48 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Frequency	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Dummy	0	
7	Dimmer	0	
8	Strobe Frequency	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Dummy	0	
13	Dimmer	0	
14	Strobe Frequency	0	
15	Red	0	
16	Green	0	
17	Blue	0	

MODE 48 (continued)

Ch	Function	Default	DMX values
18	Dummy	0	
19	Dimmer	0	
20	Strobe Frequency	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	Dummy	0	
25	Dimmer	0	
26	Strobe Frequency	0	
27	Red	0	
28	Green	0	
29	Blue	0	
30	Dummy	0	
31	Dimmer	0	
32	Strobe Frequency	0	
33	Red	0	
34	Green	0	
35	Blue	0	
36	Dummy	0	
37	Dimmer	0	
38	Strobe Frequency	0	
39	Red	0	
40	Green	0	
41	Blue	0	
42	Dummy	0	
43	Dimmer	0	
44	Strobe Frequency	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	Dummy	0	