
Eurolite

Mega Strobe 812 Panel

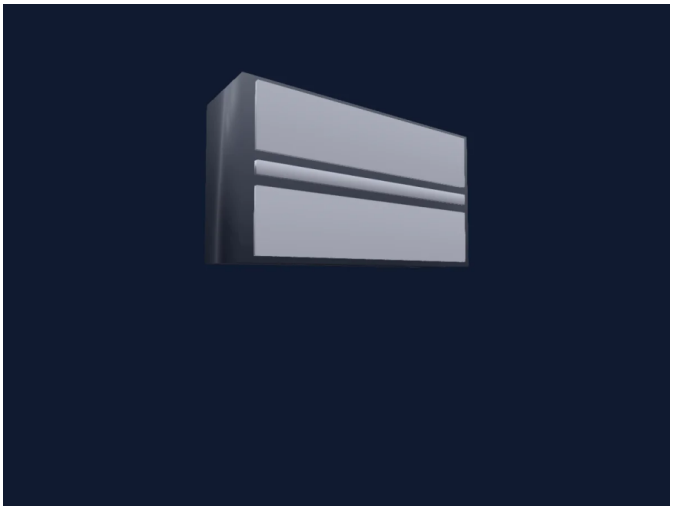

Manufacturer	**Eurolite**
Type	**Strobe**
DMX modes	**1**
DMX footprint	**21 channels**
Beam angle	**25°**
Size (W × H × D)	**500 × 150 × 270 mm**
GDTF fixture type	**1C7135B2-D761-4D52-A57C-A6…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer · Gobos · Gobo rotation

Safety-relevant functions

Strobe

DMX modes

21 CH Mode — 21 ch

21 CH Mode

21 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer Fine	0	Fine byte of Dimmer
4	Color RGBYellow	0	
5	Color RGBRed	0	
6	Color RGBGreen	0	
7	Color RGBBlue	0	
8	Shutter / Strobe	0	
9	Show	0	0–8 No Show 9–17 Show 1 18–26 Show 2 27–35 Show 3 36–44 Show 4 45–53 Show 5 54–62 Show 6 63–71 Show 7 72–80 Show 8 81–89 Show 9 90–98 Show 10 99–107 Show 11 108–116 Show 12 117–125 Show 13 126–134 Show 14 135–143 Show 15 144–152 Show 16 153–161 Show 17 162–170 Show 18 171–179 Show 19 180–188 Show 20 189–197 Show 21 198–206 Show 22 207–215 Show 23 216–224 Show 24 225–233 Show 25 234–242 Show 26 243–255 Show 27
10	Show Speed	0	
11	Show Color	0	
12	Color Macro1	0	
13	Color Macro Dimmer	0	
14	Ambient Laufrichtung	0	0–127 Rechts nach Links 128–255 Links nach Rechts
15	Dimmer	0	
16	Shutter Dimmer	0	
17	Shutter / Strobe	0	
18	Gobo Dimmer	0	
19	Gobo	0	
20	Gobo Rotation	0	
21	Strobe Laufrichtung	0	