
Event Lighting

BAR24X4FXL

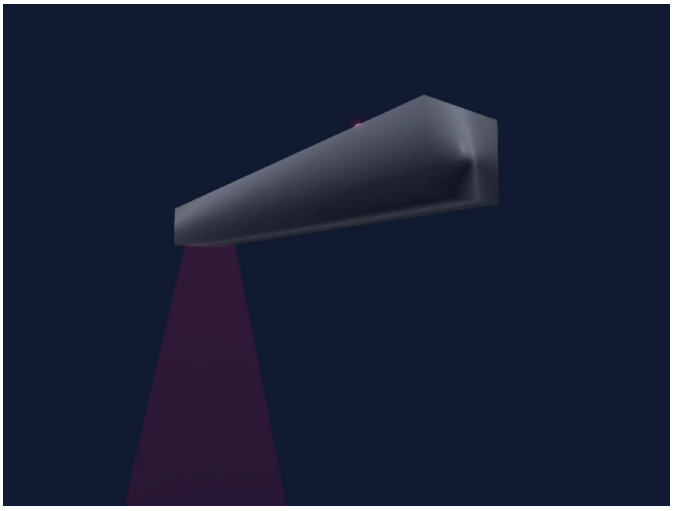

Manufacturer	**Event Lighting**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**40 channels**
Beam angle	**25°**
Size (W × H × D)	**1100 × 120 × 150 mm**
GDTF fixture type	**4C26D490-BE85-47CE-BB4E-7F…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

40ch — 40 ch

40ch

40 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Mode Strobe	0	0–9 Strobe Off 10–255 Strobe Slow > Fast
3	Color RGBRed	255	
4	Color RGBGreen	255	
5	Color RGBBlue	255	
6	White	255	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Color RGBRed	0	
36	Color RGBGreen	0	
37	Color RGBBlue	0	

40ch (continued)

Ch	Function	Default	DMX values
38	Effect	0	0–3 No Macro 4–7 Pattern 1 8–11 Pattern 2 12–15 Pattern 3 16–19 Pattern 4 20–23 Pattern 5 24–27 Pattern 6 28–31 Pattern 7 32–35 Pattern 8 36–39 Pattern 9 40–43 Pattern 10 44–47 Pattern 11 48–51 Pattern 12 52–55 Pattern 13 56–59 Pattern 14 60–63 Pattern 15 64–67 Pattern 16 68–71 Pattern 17 72–75 Pattern 18 76–79 Pattern 19 80–83 Pattern 20 84–87 Pattern 21 88–91 Pattern 22 92–95 Pattern 23 96–99 Pattern 24 100–103 Pattern 25 104–107 Pattern 26 108–111 Pattern 27 112–115 Pattern 28 116–119 Pattern 29 120–123 Pattern 30 124–127 Pattern 31 128–131 Pattern 32 132–135 Pattern 33 136–139 Pattern 34 140–143 Pattern 35 144–147 Pattern 36 148–151 Pattern 37 152–155 Pattern 38 156–159 Pattern 39 160–163 Pattern 40 164–167 Pattern 41 168–171 Pattern 42 172–175 Pattern 43 176–179 Pattern 44 180–183 Pattern 45 184–187 Pattern 46 188–191 Pattern 47 192–195 Pattern 48 196–199 Pattern 49 200–203 Pattern 50 204–207 Pattern 51 208–211 Pattern 52 212–215 Pattern 53 216–219 Pattern 54 220–223 Pattern 55 224–227 Pattern 56 228–231 Self Propelled Effect (Looping 1 - 56) 232–235 Sound Control Effect Strip 1 236–255 Sound Control Effect Strip 2
39	Effect Speed	0	

40ch (continued)

Ch	Function	Default	DMX values
40	Color Macro1	0	0–11 Black (assuming this is off) 12–23 Little Red 24–35 More Red 36–47 Most Red 48–59 Little Green 60–71 More Green 72–83 Most Green 84–95 Little Blue 96–107 More Blue 108–119 Most Blue 120–131 Little Yellow 132–143 More Yellow 144–155 Most Yellow 156–167 Little Magenta 168–179 More Magenta 180–191 Most Magenta 192–203 Little Cyan 204–215 More Cyan 216–227 Most Cyan 228–239 Little White 240–251 More White 252–255 Most White