
Expolite

Led Fresnel XAL

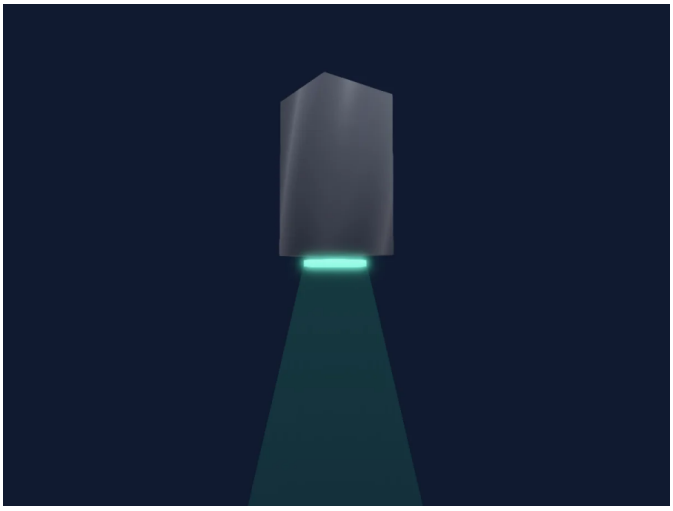

Manufacturer	**Expolite**
Type	**Spot**
DMX modes	**1**
DMX footprint	**13 channels**
Beam angle	**15-45°**
Size (W × H × D)	**261 × 510 × 261 mm**
GDTF fixture type	**FADF8743-7B0F-4310-9B8D-49…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

Default	13 ch

Default

13 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Color Add GY	0	
6	Color Add RY	0	
7	Color1Wheel Index	0	0–10 No function (wheel slot 1) 11–20 L106 (wheel slot 2) 21–30 R05 (wheel slot 3) 31–40 L194 (wheel slot 4) 41–50 R54 (wheel slot 5) 51–60 L019 (wheel slot 6) 61–70 R08 (wheel slot 7) 71–80 R89 (wheel slot 8) 81–90 R86 (wheel slot 9) 91–100 L213 (wheel slot 10) 101–110 R377 (wheel slot 11) 111–120 R80 (wheel slot 12) 121–130 L202 (wheel slot 13) 131–140 L328 (wheel slot 14) 141–150 R3314 (wheel slot 15) 151–160 L101 (wheel slot 16) 161–170 L768 (wheel slot 17) 171–255 No function (wheel slot 1)
8	Color Wheel	0	0–10 No function (wheel slot 1) 11–30 Red (wheel slot 2) 31–50 Yellow (wheel slot 3) 51–70 Green (wheel slot 4) 71–90 Cyan (wheel slot 5) 91–110 Blue (wheel slot 6) 111–130 Magenta (wheel slot 7) 131–150 Red (wheel slot 8) 151–169 White (wheel slot 9) 170–170 Blue (wheel slot 10) 171–195 FF (wheel slot 11) 196–200 2700K (wheel slot 12) 201–205 3000K (wheel slot 13) 206–210 3200K (wheel slot 14) 211–215 3500K (wheel slot 15) 216–220 4000K (wheel slot 16) 221–225 4200K (wheel slot 17) 226–230 4500K (wheel slot 18) 231–235 5600K (wheel slot 19) 236–240 6000K (wheel slot 20) 241–245 6500K (wheel slot 21) 246–250 7200K (wheel slot 22) 251–255 8000K (wheel slot 23)
9	Shutter1Strobe	0	0–109 Strobe 110–189 Strobe Lightning 190–255 Strobe Random
10	Zoom	0	

Default (continued)

Ch	Function	Default	DMX values
11	Color Mix Mode	0	0–40 No function 41–60 Auto 1 61–80 Auto 2 81–100 Auto 3 101–120 Auto 4 121–140 Auto 5 141–160 Auto 6 161–180 Auto 7 181–200 Auto 8 201–220 Auto 9 221–255 Auto 10
12	Color Mix MSpeed	0	
13	Dimmer Mode	0	0–9 No function 10–29 Off 30–69 Dim1 70–129 Dim2 130–189 Dim3 190–255 Dim4