
Flash

DJ LedBar AURA

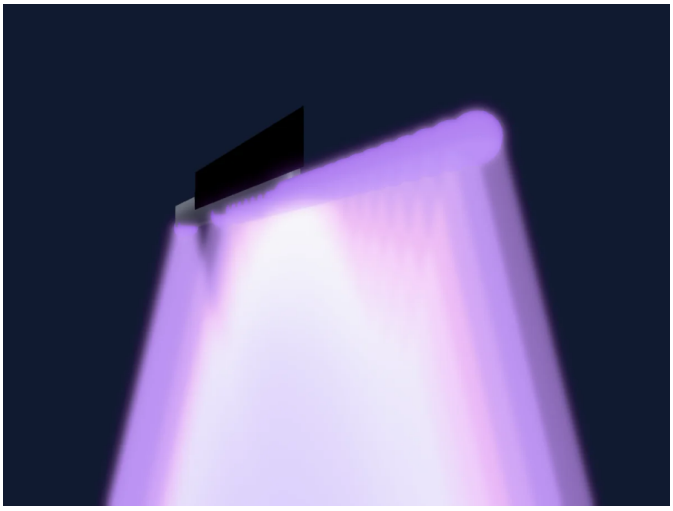

Manufacturer	**Flash**
Type	**LED bar**
DMX modes	**3**
DMX footprint	**4, 12, 43 channels**
Beam angle	**25°**
Size (W × H × D)	**1000 × 100 × 80 mm**
GDTF fixture type	**DA88191E-E994-4103-B263-4E…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Strobe · Dimmer · Pixel control

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

4ch	4 ch
12ch	12 ch
56ch	43 ch

4ch

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

12ch

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Min strobe 255–255 Max strobe
3	Effect	0	
4	Dummy	0	
5	Effect 2	0	
6	Effect Speed 2	0	
7	Effect 3	0	
8	Effect Speed 3	0	
9	Red	255	
10	Green	255	
11	Blue	255	
12	White	0	

56ch

43 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Reserved 4	0	
5	Reserved 5	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	

56ch (continued)

Ch	Function	Default	DMX values
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	White	255	