
Flash

LED WALL WASHER BAR LIGHT 24x3W RGB

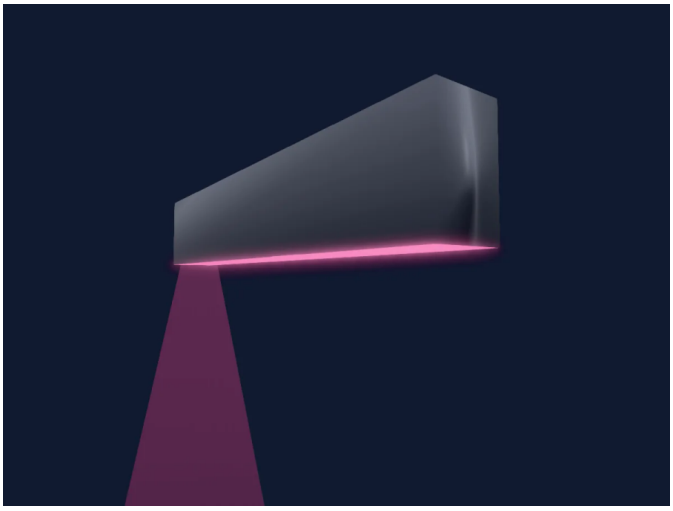

Manufacturer	**Flash**
Type	**PAR**
DMX modes	**5**
DMX footprint	**5, 8, 14, 26, 50 channels**
Beam angle	**25°**
Size (W × H × D)	**1000 × 180 × 110 mm**
GDTF fixture type	**D8135F4A-795D-4A07-A995-33…**

Controls

RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Strobe

DMX modes

5ch	5 ch
8ch	8 ch
14ch	14 ch
26ch	26 ch
50ch	50 ch

5ch

5 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Macro1	0	0–7 No function 8–22 Color chase 1 23–37 Color chase 2 38–52 Color chase 3 53–67 Color chase 4 68–82 Color chase 5 83–97 Color chase 6 98–112 Color chase 7 113–127 Color chase 8 128–142 Color chase 9 143–157 Color chase 10 158–172 Color chase 11 173–187 Color chase 12 188–202 Color chase 13 203–217 Color chase 14 218–232 Color chase 15 233–247 Color chase 16 248–255 Sound mode
5	Color Macro1Rate	0	0–254 Slow 255–255 Fast

8ch

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Macro1	0	0–7 No function 8–22 Color chase 1 23–37 Color chase 2 38–52 Color chase 3 53–67 Color chase 4 68–82 Color chase 5 83–97 Color chase 6 98–112 Color chase 7 113–127 Color chase 8 128–142 Color chase 9 143–157 Color chase 10 158–172 Color chase 11 173–187 Color chase 12 188–202 Color chase 13 203–217 Color chase 14 218–232 Color chase 15 233–247 Color chase 16 248–255 Sound mode
7	Color Effects1	0	
8	Color Macro1Rate	0	0–254 Slow 255–255 Fast

14ch

14 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Effects1	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Color Macro1	0	0–7 No function 8–22 Color chase 1 23–37 Color chase 2 38–52 Color chase 3 53–67 Color chase 4 68–82 Color chase 5 83–97 Color chase 6 98–112 Color chase 7 113–127 Color chase 8 128–142 Color chase 9 143–157 Color chase 10 158–172 Color chase 11 173–187 Color chase 12 188–202 Color chase 13 203–217 Color chase 14 218–232 Color chase 15 233–247 Color chase 16 248–255 Sound mode
14	Color Macro1Rate	0	0–254 Slow 255–255 Fast

26ch

26 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Effects1	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	

26ch (continued)

Ch	Function	Default	DMX values
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Color Macro1	0	0–7 No function 8–22 Color chase 1 23–37 Color chase 2 38–52 Color chase 3 53–67 Color chase 4 68–82 Color chase 5 83–97 Color chase 6 98–112 Color chase 7 113–127 Color chase 8 128–142 Color chase 9 143–157 Color chase 10 158–172 Color chase 11 173–187 Color chase 12 188–202 Color chase 13 203–217 Color chase 14 218–232 Color chase 15 233–247 Color chase 16 248–255 Sound mode
26	Color Macro1Rate	0	0–254 Slow 255–255 Fast

50ch

50 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Effects1	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	

50ch (continued)

Ch	Function	Default	DMX values
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	

50ch (continued)

Ch	Function	Default	DMX values
49	Color Macro1	0	0–7 No function 8–22 Color chase 1 23–37 Color chase 2 38–52 Color chase 3 53–67 Color chase 4 68–82 Color chase 5 83–97 Color chase 6 98–112 Color chase 7 113–127 Color chase 8 128–142 Color chase 9 143–157 Color chase 10 158–172 Color chase 11 173–187 Color chase 12 188–202 Color chase 13 203–217 Color chase 14 218–232 Color chase 15 233–247 Color chase 16 248–255 Sound mode
50	Color Macro1Rate	0	0–254 Slow 255–255 Fast