
Fun Generation

LED Pot 12x1W QCL

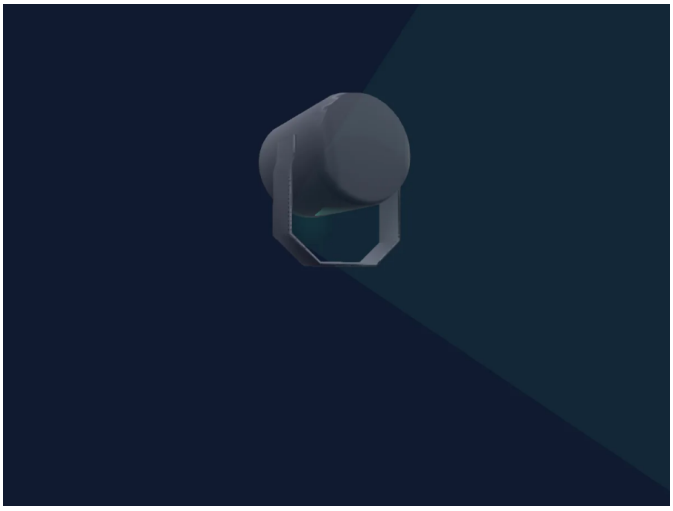

Manufacturer	**Fun Generation**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 6, 8 channels**
Beam angle	**40°**
Size (W × H × D)	**120 × 180 × 150 mm**
GDTF fixture type	**2084EED1-9A18-4A12-A8BC-35…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

4-Channel	4 ch
6-Channel	6 ch
8-Channel	8 ch

4-Channel

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

6-Channel

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 Off 63–126 25% 127–190 50% 191–254 75% 255–255 Full
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	255	
6	Shutter / Strobe	0	0–0 Open 1–255 Strobe

8-Channel

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 Off 63–126 25% 127–190 50% 191–254 75% 255–255 Full
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	255	
6	Programm Select	0	
7	Color Macro1	0	
8	Shutter / Strobe	0	0–0 Open 1–255 Strobe