
Fun Generation

PartyPar 12 DMX

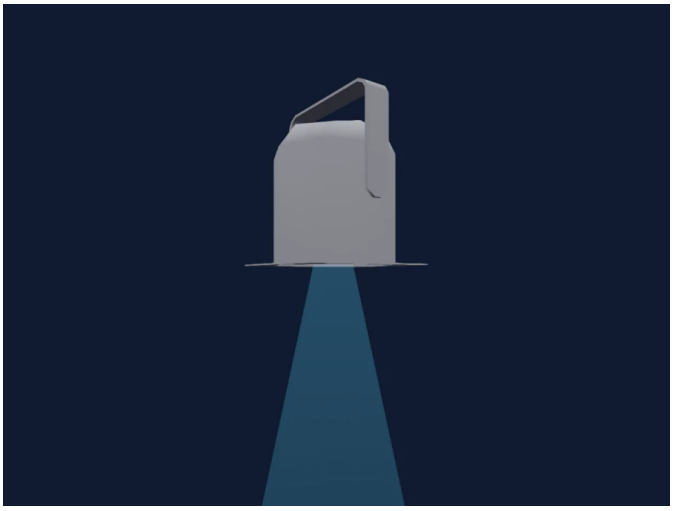

Manufacturer	**Fun Generation**
Type	**PAR**
DMX modes	**3**
DMX footprint	**3, 4, 5 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**9F25F3C2-BA52-4FA5-AC4C-0B…**

Controls

RGB colour mixing · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

3-channel mode	3 ch
4-channel mode	4 ch
5-channel mode	5 ch

3-channel mode

3 channels

Ch	Function	Default	DMX values
1	Red	128	
2	Green	128	
3	Blue	128	

4-channel mode

4 channels

Ch	Function	Default	DMX values
1	Color RGBRed	128	
2	Color RGBGreen	128	
3	Color RGBBlue	128	
4	Strobe Rate	0	0–0 No function 1–255 Strobe effect 0-100%

5-channel mode

5 channels

Ch	Function	Default	DMX values
1	Color RGBRed	255	
2	Color RGBGreen	255	
3	Color RGBBlue	255	
4	Dimmer	0	
5	Shutter / Strobe	4	0–4 Strobe 5–255 Shutter1Strobe 2