
Generic

14 * 3W WW LED Bar with RGB Aura

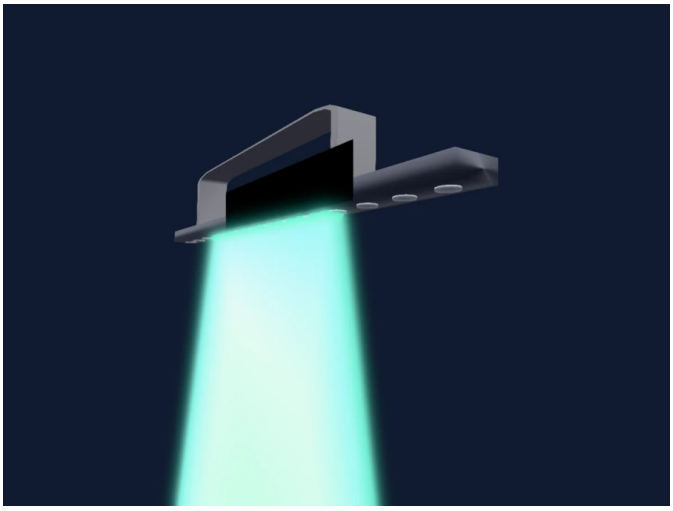

Manufacturer	**Generic**
Type	**LED bar**
DMX modes	**3**
DMX footprint	**10, 24, 56 channels**
Beam angle	**3-25°**
Heads / cells	**14**
Size (W × H × D)	**1000 × 30 × 71 mm**
GDTF fixture type	**30AFBF9F-B521-4516-B5B1-6B…**

Controls

Colour wheel · Effect speed · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

10 Channel	10 ch
24 Channel Mode	24 ch
56 Channel	56 ch

10 Channel

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	255	
3	Shutter1Strobe	0	0–0 Open 1–254 Slow 255–255 Fast
4	Effect	0	
5	Effect Speed	0	0–254 Slow 255–255 Fast
6	Dimmer	255	
7	Shutter1Strobe	0	0–0 Open 1–254 Slow 255–255 Fast
8	Color Wheel	0	0–6 White (wheel slot 1) 7–45 Red (wheel slot 2) 46–83 Green (wheel slot 3) 84–121 Blue (wheel slot 4) 122–159 Yellow (wheel slot 5) 160–197 Magenta (wheel slot 6) 198–255 Cyan (wheel slot 7)
9	Effect	0	0–7 Off 8–255 Color FX
10	Effect Speed	0	0–254 Slow 255–255 Fast

24 Channel Mode

24 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Effect	0	
4	Effect Speed	0	0–254 Slow 255–255 Fast
5	Shutter1Strobe	0	0–0 Open 1–254 Slow 255–255 Fast
6	Dimmer	0	
7	Dimmer	0	
8	Dimmer	0	
9	Dimmer	0	
10	Dimmer	0	
11	Dimmer	0	
12	Dimmer	0	
13	Dimmer	0	
14	Dimmer	0	
15	Dimmer	0	
16	Dimmer	0	
17	Dimmer	0	
18	Dimmer	0	
19	Dimmer	0	

24 Channel Mode (continued)

Ch	Function	Default	DMX values
20	Dimmer	255	
21	Shutter1Strobe	255	
22	Color Wheel	0	0–6 White (wheel slot 1) 7–45 Red (wheel slot 2) 46–83 Green (wheel slot 3) 84–121 Blue (wheel slot 4) 122–159 Yellow (wheel slot 5) 160–197 Magenta (wheel slot 6) 198–255 Cyan (wheel slot 7)
23	Effect	0	0–7 Off 8–255 Color FX
24	Effect Speed	0	0–254 Slow 255–255 Fast

56 Channel

56 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	
5	Dimmer	0	
6	Dimmer	0	
7	Dimmer	0	
8	Dimmer	0	
9	Dimmer	0	
10	Dimmer	0	
11	Dimmer	0	
12	Dimmer	0	
13	Dimmer	0	
14	Dimmer	0	
15	Red	255	
16	Green	255	
17	Blue	255	
18	Red	255	
19	Green	255	
20	Blue	255	
21	Red	255	
22	Green	255	
23	Blue	255	
24	Red	255	
25	Green	255	
26	Blue	255	
27	Red	255	
28	Green	255	
29	Blue	255	
30	Red	255	
31	Green	255	

56 Channel (continued)

Ch	Function	Default	DMX values
32	Blue	255	
33	Red	255	
34	Green	255	
35	Blue	255	
36	Red	255	
37	Green	255	
38	Blue	255	
39	Red	255	
40	Green	255	
41	Blue	255	
42	Red	255	
43	Green	255	
44	Blue	255	
45	Red	255	
46	Green	255	
47	Blue	255	
48	Red	255	
49	Green	255	
50	Blue	255	
51	Red	255	
52	Green	255	
53	Blue	255	
54	Red	255	
55	Green	255	
56	Blue	255	