
Ignition

co9 v2

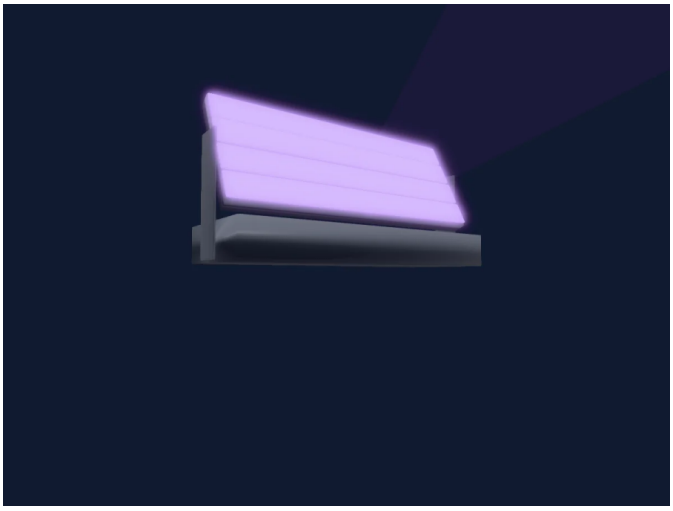

Manufacturer	**Ignition**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**29 channels**
Beam angle	**25°**
Heads / cells	**4**
Size (W × H × D)	**585 × 70 × 220 mm**
GDTF fixture type	**A026741D-A938-4A84-8301-BF…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer · Pixel control

DMX modes

29 ch — 29 ch

29 ch

29 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	0–5 Open 6–10 Close 11–33 RandomPulse 34–56 Random Ramp Up 57–79 Random Ramp Down 80–102 Random Strobe 103–127 Strobe Break 128–250 Strobe 251–255 Open 2
3	Red	0	
4	Green	0	
5	Blue	0	
6	White	0	
7	Color Macro1	0	0–5 Blackout 6–13 Red 14–21 Amber 22–29 Yellowish-amber coloured 30–37 Yellow 38–45 Green 46–53 Turquoise 54–61 Cyan 62–69 Blue 70–77 Lavender 78–85 Mauve 86–93 Magenta 94–101 Pink 102–109 Warm white 110–117 White 118–127 Cold white 128–191 Colour change effect increasing speed 192–255 Farbeffekt Geschwindigkeit ansteigend
8	Color Effects1	0	
9	Animation System1Macro	0	
10	Animation System1	0	
11	Effects1Fade	0	
12	Dimmer Curve	0	6–63 Linear 64–127 Exponential 128–191 Logarithmic 192–255 S-shaped
13	Control1	0	6–63 Dimmer characteristic LED 3 s delay 64–127 Dimmer characteristic Halogen 5 s delay 128–191 Fan speed constantly high 192–255 Automatic fan speed control
14	Red	0	
15	Green	0	
16	Blue	0	
17	White	0	
18	Red	0	
19	Green	0	
20	Blue	0	
21	White	0	
22	Red	0	
23	Green	0	

29 ch (continued)

Ch	Function	Default	DMX values
24	Blue	0	
25	White	0	
26	Red	0	
27	Green	0	
28	Blue	0	
29	White	0	