
Ignition

WAL-L710 PAR W-DMX

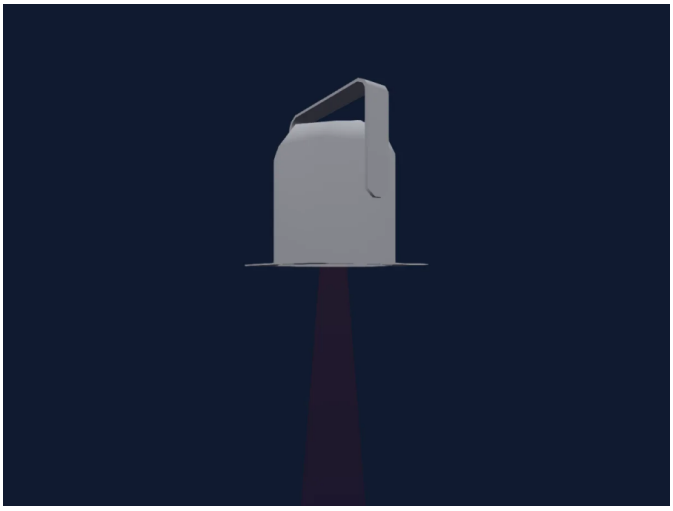

Manufacturer	**Ignition**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**6 channels**
Beam angle	**10°**
Size (W × H × D)	**250 × 195 × 45 mm**
GDTF fixture type	**EBB7E746-3A8F-440F-AB63-B3…**

Controls

Extra LED colours · RGB colour mixing · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

6 Channel — 6 ch

6 Channel

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Shutter / Strobe	0	0–10 Open 11–255 Strobe