
Jolly

LP-1915

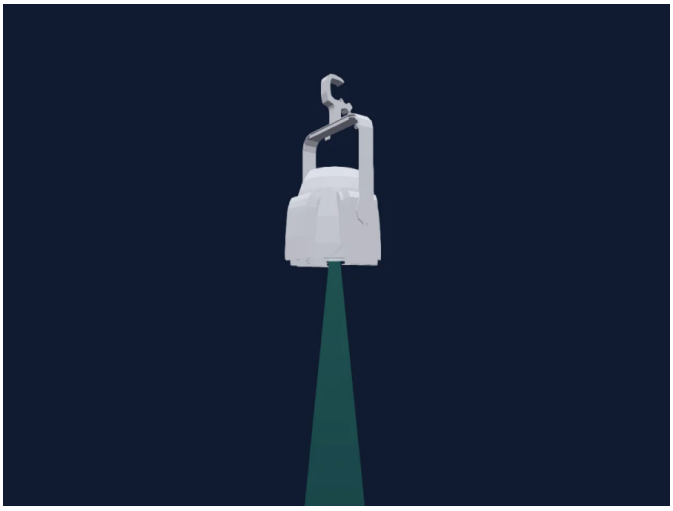

Manufacturer	**Jolly**
Type	**PAR**
DMX modes	**2**
DMX footprint	**8, 14 channels**
Beam angle	**12°**
Size (W × H × D)	**25 × 124 × 114 mm**
GDTF fixture type	**ABD1E81A-CC49-4770-9316-EB...**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

mode1	8 ch
mode2	14 ch

mode1

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	C TO	0	
6	Shutter / Strobe	0	0–2 Open 3–5 Closed 6–7 Slow Random 8–10 Med Random 11–12 Fast Random 13–127 Strobe 128–129 Pulse Random Slow 130–131 Pulse Random Med 132–133 Pulse Random Fast 134–191 Pulse 192–193 Pulse Slow Random 194–195 Pulse Med Random 196–197 Pulse Fast Random 198–255 Pulse Range
7	Dimmer	0	
8	Color Macro1	0	

mode2

14 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Red Fine	0	Fine byte of Red
3	Green	0	
4	Green Fine	0	Fine byte of Green
5	Blue	0	
6	Blue Fine	0	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White
9	C TO	0	
10	Shutter / Strobe	0	0–2 Open 3–5 Closed 6–7 Slow Random 8–10 Med Random 11–12 Fast Random 13–127 Strobe 128–129 Pulse Random Slow 130–131 Pulse Random Med 132–133 Pulse Random Fast 134–191 Pulse 192–193 Pulse Slow Random 194–195 Pulse Med Random 196–197 Pulse Fast Random 198–255 Pulse Range
11	Dimmer	0	
12	Dimmer Mode	0	
13	Color Macro1	0	
14	Dimmer Curve	0	