
LEDJ

Spectra Par 12HEX10

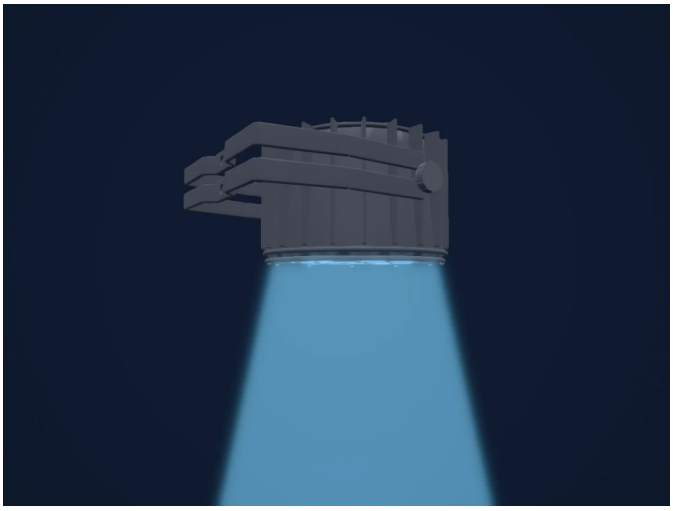

Manufacturer	**LEDJ**
Type	**PAR**
DMX modes	**3**
DMX footprint	**6, 8, 10 channels**
Beam angle	**28°**
Size (W × H × D)	**295 × 179 × 337 mm**
GDTF fixture type	**73B6B9C9-BE10-575B-9721-C7…**

Controls

Extra LED colours · RGB colour mixing · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

6CH (provisional)	6 ch
8CH (provisional)	8 ch
10CH (provisional)	10 ch

6CH (provisional)

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Amber	0	
6	UV	0	

8CH (provisional)

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Amber	0	
7	UV	0	
8	Shutter / Strobe	0	0–0 Strobe off (assumed) 1–255 Strobe slow to fast (estimated preview)

10CH (provisional)

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Amber	0	
7	UV	0	
8	No Feature	0	0–0 No function 1–20 Program1 static colours 21–41 Program2 42–62 Program3 63–83 Program4 84–104 Program5 105–125 Program6 126–146 Program7 147–167 Program8 168–188 Program9 189–209 Program10 210–230 Program11 231–255 Program12

10CH (provisional) (continued)

Ch	Function	Default	DMX values
9	No Feature	0	0–0 No function 1–16 Red when Program1; otherwise program speed 17–33 Green when Program1; otherwise program speed 34–50 Blue when Program1; otherwise program speed 51–67 White when Program1; otherwise program speed 68–84 Amber when Program1; otherwise program speed 85–101 UV when Program1; otherwise program speed 102–118 Orange when Program1; otherwise program speed 119–135 Yellow when Program1; otherwise program speed 136–152 Magenta when Program1; otherwise program spe… 153–169 Hot Pink when Program1; otherwise program speed 170–186 Cyan when Program1; otherwise program speed 187–203 Pastel Red when Program1; otherwise program sp… 204–220 Pastel Green when Program1; otherwise program … 221–237 Pastel Blue when Program1; otherwise program s… 238–254 Warm White when Program1; otherwise program … 255–255 Cool White when Program1; otherwise program s…
10	Shutter / Strobe	0	0–0 Strobe off (assumed) 1–255 Strobe slow to fast (estimated preview)

Fixture model: gdtf-ledj-spectra-par-12hex10-2611035202
Original HitLight parametric reconstruction. Manufacturer drawings and photographs used as dimensional and visual references; no third-part…
Creator: HitLight