
Lightmaxx

Vega BAR RGBW 24x 4W

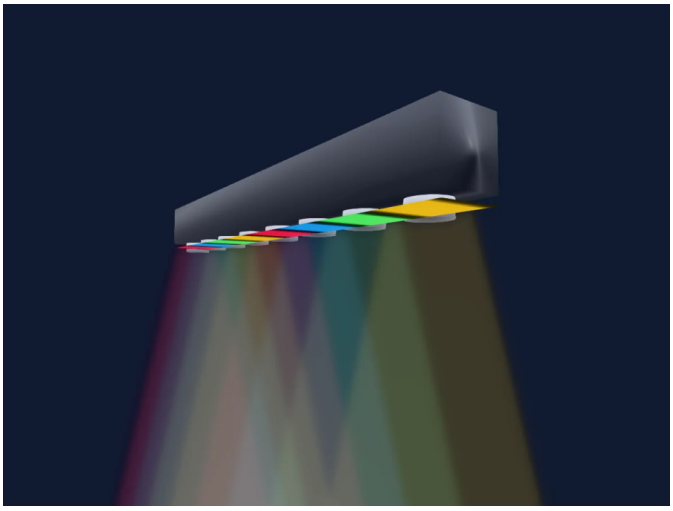

Manufacturer	**Lightmaxx**
Type	**PAR**
DMX modes	**1**
DMX footprint	**58 channels**
Beam angle	**25°**
Heads / cells	**8**
Size (W × H × D)	**800 × 80 × 80 mm**
GDTF fixture type	**3DAFDF0B-B0C7-47CA-82AE-3…**

Controls

Colour wheel · Dimmer · Pixel control

DMX modes

Default	58 ch

Default

58 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Strobe Rate	0	
3	Red	255	
4	Green	255	
5	Blue	255	
6	White	0	
7	Autoprogram	0	0–254 Closed 255–255 Open
8	Dimmer	0	0–254 Closed 255–255 Open
9	Strobe Rate	0	
10	Red	255	
11	Green	255	
12	Blue	255	
13	White	0	
14	Autoprogram	0	0–254 Closed 255–255 Open
15	Dimmer	0	0–254 Closed 255–255 Open
16	Strobe Rate	0	
17	Red	255	
18	Green	255	
19	Blue	255	
20	White	0	
21	Autoprogram	0	0–254 Closed 255–255 Open
22	Dimmer	0	0–254 Closed 255–255 Open
23	Strobe Rate	0	
24	Red	255	
25	Green	255	
26	Blue	255	
27	White	0	
28	Autoprogram	0	0–254 Closed 255–255 Open
29	Dimmer	0	0–254 Closed 255–255 Open
30	Strobe Rate	0	
31	Red	255	
32	Green	255	
33	Blue	255	
34	White	0	
35	Autoprogram	0	0–254 Closed 255–255 Open
36	Dimmer	0	0–254 Closed 255–255 Open
37	Strobe Rate	0	

Default (continued)

Ch	Function	Default	DMX values
38	Red	255	
39	Green	255	
40	Blue	255	
41	White	0	
42	Autoprogram	0	0–254 Closed 255–255 Open
43	Dimmer	0	0–254 Closed 255–255 Open
44	Strobe Rate	0	
45	Red	255	
46	Green	255	
47	Blue	255	
48	White	0	
49	Autoprogram	0	0–254 Closed 255–255 Open
50	Dimmer	0	0–254 Closed 255–255 Open
51	Strobe Rate	0	
52	Red	255	
53	Green	255	
54	Blue	255	
55	White	0	
56	Autoprogram	0	0–254 Closed 255–255 Open
57	Color Effects1	0	0–254 Closed 255–255 Open
58	Color Mix MSpeed	0	0–254 Closed 255–255 Open