
LPL

Stormy 3000

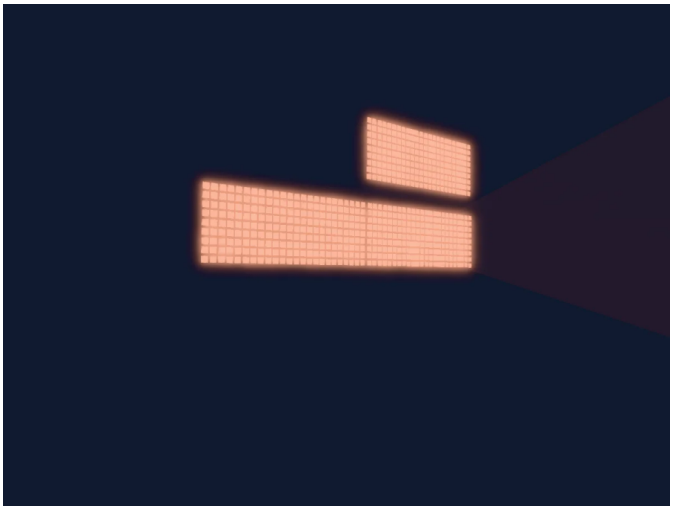

Manufacturer	**LPL**
Type	**PAR**
DMX modes	**5**
DMX footprint	**4, 7, 13, 15, 31 channels**
Beam angle	**32°**
Size (W × H × D)	**462 × 176 × 70 mm**
GDTF fixture type	**44E889A1-E87F-4844-B9AC-06…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

04 CH	4 ch
07 CH	7 ch
13 CH	13 ch
15 CH	15 ch
31CH	31 ch

04 CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	

07 CH

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Strobe Duration	0	
3	Shutter / Strobe	0	0–4 Open 5–255 ShutterStrobe
4	Reserved 4	0	
5	Color Effects1	0	
6	Color Macro1Rate	0	
7	Color Wheel	0	

13 CH

13 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Strobe Duration	0	
7	Shutter / Strobe	0	0–4 Open 5–255 ShutterStrobe
8	Color Macro2	0	
9	Color Macro3	0	
10	Color Macro1Rate	0	
11	Color Effects1	0	
12	Dummy	0	
13	Dummy	0	

15 CH

15 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Strobe Duration	0	

15 CH (continued)

Ch	Function	Default	DMX values
7	Shutter / Strobe	0	0–4 Open 5–255 ShutterStrobe
8	Color Macro2	0	
9	Color Macro3	0	
10	Color Macro1Rate	0	
11	Color Effects1	0	
12	Dummy	0	
13	Dummy	0	
14	Dummy	0	
15	Dummy	0	

31CH

31 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–9 min 10–49 low 50–254 mid 255–255 full
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Strobe Duration	0	
27	Shutter / Strobe	0	0–4 Open 5–255 ShutterStrobe
28	Reserved 28	0	
29	Color Macro2	0	

31CH (continued)

Ch	Function	Default	DMX values
30	Color Macro3	0	
31	Color Macro1Rate	0	