
LPL

Strobo 1000w

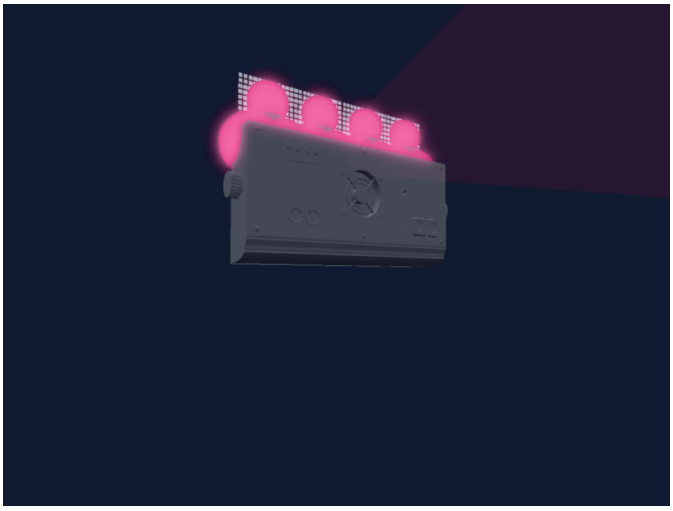

Manufacturer	**LPL**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 11, 32 channels**
Beam angle	**22-32°**
Size (W × H × D)	**462 × 176 × 70 mm**
GDTF fixture type	**860F0787-6FCE-4D4C-95B4-07…**

Controls

RGB colour mixing · Colour wheel · Strobe · Dimmer

DMX modes

04CH	4 ch
11CH	11 ch
39CH	32 ch

04CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Dimmer	0	

11CH

11 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–9 min 10–49 low 50–254 mid 255–255 full
2	Shutter / Strobe	0	0–45 Open 46–122 Strobe · Slow 1–4.27 Hz 123–255 Strobe · Fast 4.32–10 Hz
3	Color Macro1	0	
4	Color Macro1Rate	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	Shutter / Strobe	0	0–45 Open 60–139 Strobe · Slow 1.6–5 Hz 140–255 Strobe · Fast 5.05–10 Hz
9	Color Macro1	0	
10	Color Macro1Rate	0	
11	Dimmer	0	

39CH

32 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–9 min 10–49 low 50–254 mid 255–255 full
2	Shutter / Strobe	0	0–45 Open 46–122 Strobe · Slow 1–4.27 Hz 123–255 Strobe · Fast 4.32–10 Hz
3	Color Macro1	0	
4	Color Macro1Rate	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	

39CH (continued)

Ch	Function	Default	DMX values
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Shutter / Strobe	0	0–45 Open 60–139 Strobe · Slow 1.6–5 Hz 140–255 Strobe · Fast 5.05–10 Hz
30	Color Macro1	0	
31	Color Macro1Rate	0	
32	Dimmer	0	