
MARK

AVATAR 3000

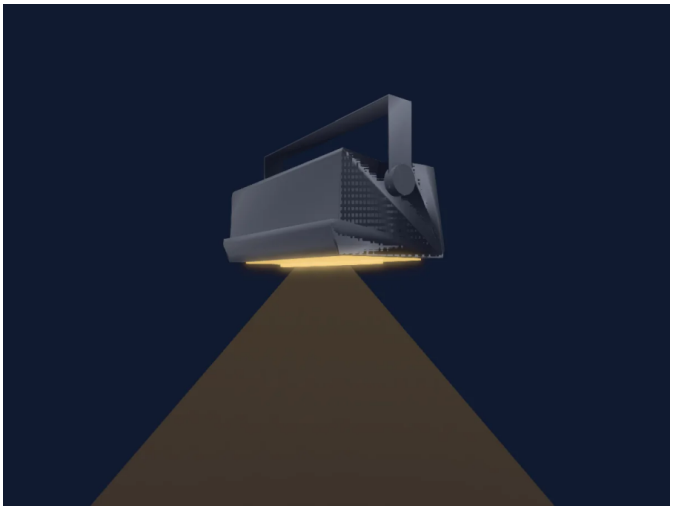

Manufacturer	**MARK**
Type	**PAR**
DMX modes	**3**
DMX footprint	**3, 4, 14 channels**
Beam angle	**82-82.018173°**
Size (W × H × D)	**464 × 260 × 245 mm**
GDTF fixture type	**47BAEB6F-1501-4F36-B158-39…**

Controls

RGB colour mixing · Colour wheel · Dimmer

DMX modes

3 CHANNELS	3 ch
4 CHANNELS	4 ch
14 CHANNELS	14 ch

3 CHANNELS

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Duration	0	
3	Shutter1Strobe	0	0–5 Open 6–255 S > F

4 CHANNELS

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Duration	0	
3	Shutter1Strobe	0	0–5 Open 6–255 S > F
4	Shutter1Strobe Effect	0	0–5 No Function 6–42 Ramp Up 43–85 Ramp Down 86–128 Ramp Up + Down 129–171 Random 172–214 Lighting 215–255 Spikes

14 CHANNELS

14 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Duration	0	
3	Shutter1Strobe	0	0–5 Open 6–255 S > F
4	Shutter1Strobe Effect	0	0–5 No Function 6–42 Ramp Up 43–85 Ramp Down 86–128 Ramp Up + Down 129–171 Random 172–214 Lighting 215–255 Spikes
5	No Feature	0	
6	Color Effects1	51	
7	Color Mix MSpeed	0	
8	No Feature	0	
9	Shutter1Strobe	0	0–19 Close 20–50 Open 51–200 S > F 201–210 Open 211–255 S > F
10	Dimmer	0	
11	Red	0	
12	Green	0	
13	Blue	0	
14	Color Effects2	0	