
MARK

FLM 202

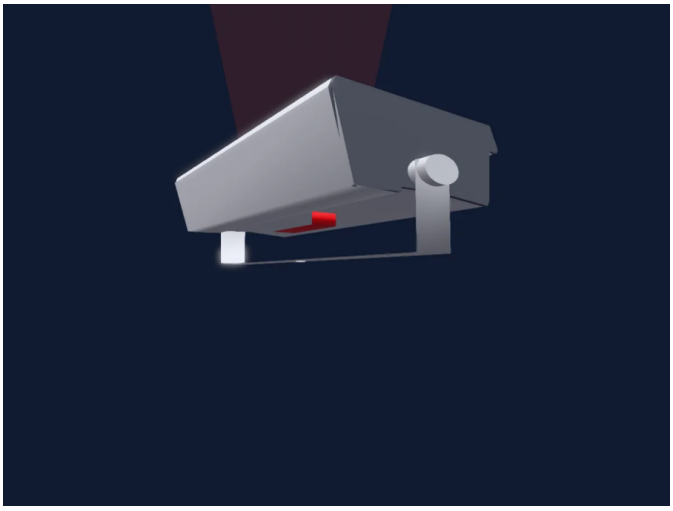

Manufacturer	**MARK**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**5 channels**
Beam angle	**25°**
Size (W × H × D)	**312 × 90 × 140 mm**
GDTF fixture type	**25D7E249-93B1-4C7B-8FA7-5E…**

Controls

Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

5 CHANNELS — 5 ch

5 CHANNELS

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
2	Shutter1Strobe	255	0–3 Open 4–4 Min Strobe 5–254 Strobe S > F 255–255 Max Strobe
3	Effect	255	0–9 Open 10–10 Min Sequence 11–254 Sequence 255–255 Max Sequence
4	Effect 2	255	0–9 Open 10–10 Min Full LED 11–254 Full LED 255–255 Max Full LED
5	Effect 3	255	0–9 Open 10–10 Min Sequence + Full LED 11–254 Sequence + Full LED 255–255 Max Sequence + Full LED