
MARK

FLM 400 RGB W

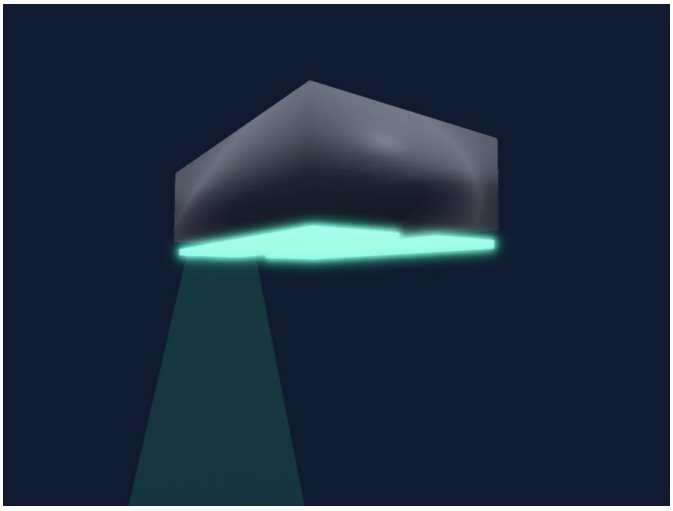

Manufacturer	**MARK**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**4, 13 channels**
Beam angle	**25°**
Heads / cells	**2**
Size (W × H × D)	**402 × 109 × 261 mm**
GDTF fixture type	**6CB2824C-760A-4FED-86CB-42…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Strobe · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

32 CHANNELS	4 ch
13 CHANNELS	13 ch

32 CHANNELS

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

13 CHANNELS

13 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	25	
3	Green	255	
4	Blue	255	
5	White	0	
6	Effect	0	0–7 Open 8–15 Macro 1 16–23 Macro 2 24–31 Macro 3 32–39 Macro 4 40–47 Macro 5 48–55 Macro 6 56–63 Macro 7 64–71 Macro 8 72–79 Macro 9 80–87 Macro 10 88–95 Macro 11 96–103 Macro 12 104–111 Macro 13 112–119 Macro 14 120–127 Macro 15 128–135 Macro 16 136–143 Macro 17 144–151 Macro 18 152–159 Macro 19 160–167 Macro 20 168–175 Macro 21 176–183 Macro 22 184–191 Macro 23 192–199 Macro 24 200–207 Macro 25 208–215 Macro 26 216–223 Macro 27 224–231 Macro 28 232–239 Macro 29 240–247 Macro 30 248–255 Macro 31
7	Effect Speed	0	
8	Shutter / Strobe	0	0–8 Open 9–255 Strobe · Slow > Fast
9	Red	255	
10	Green	255	
11	Blue	255	
12	White	0	
13	Effects1Pos	0	0–127 Normal Direction 128–255 Reversed Direction