
MARK

MBAR RGB

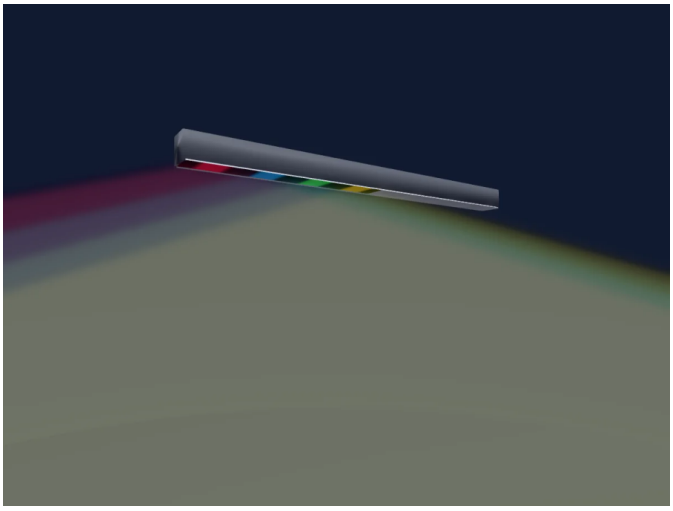

Manufacturer	**MARK**
Type	**PAR**
DMX modes	**2**
DMX footprint	**26, 50 channels**
Beam angle	**140°**
Heads / cells	**8**
Size (W × H × D)	**1010 × 60 × 60 mm**
GDTF fixture type	**A0F50BA1-21F4-402E-82C3-3F…**

Controls

Colour wheel · Dimmer · Pixel control

DMX modes

MODE 26	26 ch
MODE 50	50 ch

MODE 26

26 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Frequency	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Effects1	0	
7	Dimmer	0	
8	Strobe Frequency	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Color Effects1	0	
13	Dimmer	0	
14	Strobe Frequency	0	
15	Red	0	
16	Green	0	
17	Blue	0	
18	Color Effects1	0	
19	Dimmer	0	
20	Strobe Frequency	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	Color Effects1	0	
25	Color Macro1	0	
26	Color Macro1Rate	0	

MODE 50

50 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Frequency	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Color Effects1	0	
7	Dimmer	0	
8	Strobe Frequency	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Color Effects1	0	
13	Dimmer	0	
14	Strobe Frequency	0	
15	Red	0	

MODE 50 (continued)

Ch	Function	Default	DMX values
16	Green	0	
17	Blue	0	
18	Color Effects1	0	
19	Dimmer	0	
20	Strobe Frequency	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	Color Effects1	0	
25	Dimmer	0	
26	Strobe Frequency	0	
27	Red	0	
28	Green	0	
29	Blue	0	
30	Color Effects1	0	
31	Dimmer	0	
32	Strobe Frequency	0	
33	Red	0	
34	Green	0	
35	Blue	0	
36	Color Effects1	0	
37	Dimmer	0	
38	Strobe Frequency	0	
39	Red	0	
40	Green	0	
41	Blue	0	
42	Color Effects1	0	
43	Dimmer	0	
44	Strobe Frequency	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	Color Effects1	0	
49	Color Effects1	0	
50	Color Macro1Rate	0	