
MARK

MKL 120 P RGBW

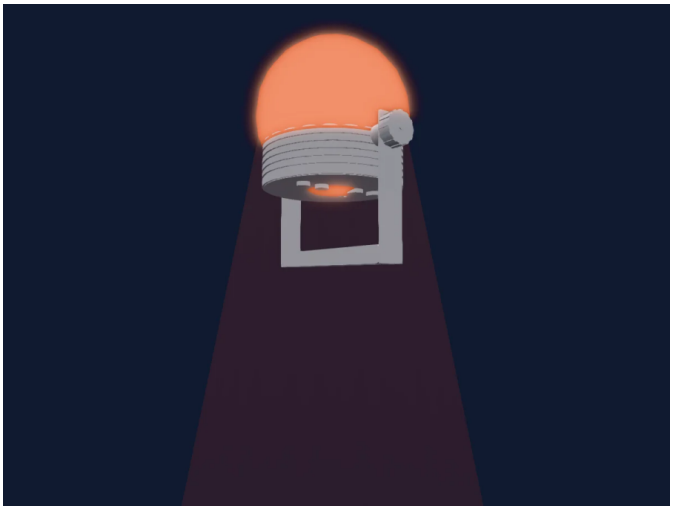

Manufacturer	**MARK**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**4, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**181 × 98 × 175 mm**
GDTF fixture type	**E9229871-3321-4432-9856-112…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

4CH	4 ch
8CH	8 ch

4CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min to Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min to Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min to Max 255–255 Max
4	White	0	0–0 Min 1–254 Min to Max 255–255 Max

8CH

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min to Max 255–255 Max
2	Red	255	0–0 Min 1–254 Min to Max 255–255 Max
3	Green	255	0–0 Min 1–254 Min to Max 255–255 Max
4	Blue	255	0–0 Min 1–254 Min to Max 255–255 Max
5	White	255	0–0 Min 1–254 Min to Max 255–255 Max
6	Shutter / Strobe	0	0–0 Open 1–1 Strobe Linear · Min 0 Hz 2–254 Strobe Linear · Min to Max 0.0787–19.9 Hz 255–255 Strobe Linear · Max 20 Hz
7	Effect Speed	0	0–0 Min 1–254 Min to Max 255–255 Max
8	Effect	0	0–59 DMX Control 60–119 Static Mode 120–179 Jump Mode 180–239 Gradual Mode 240–255 Sound Mode