
MARK

MKL 180P RGBW

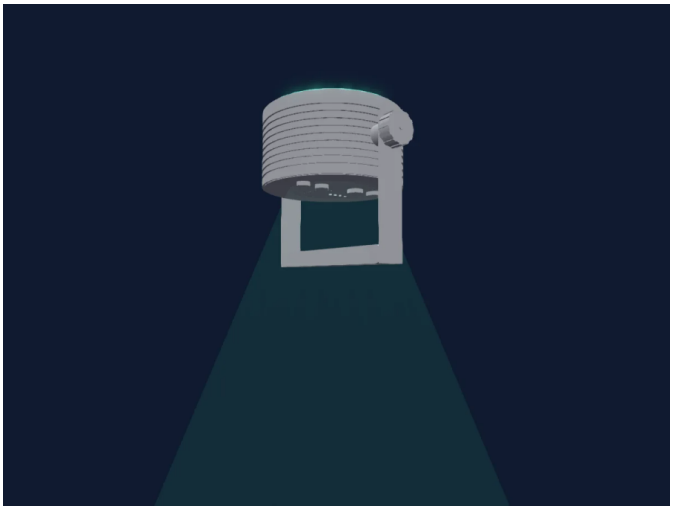

Manufacturer	**MARK**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**9 channels**
Beam angle	**45°**
Size (W × H × D)	**247 × 160 × 37 mm**
GDTF fixture type	**333CB5B8-BBD2-44FE-8FA5-C4…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

9 CH — 9 ch

9 CH

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Shutter1Strobe	0	0–0 Open 1–255 Slow > Fast
7	Shutter / Strobe	0	0–20 Open 21–255 Close
8	Effect Speed	0	
9	Effect	0	0–59 DMX Control 60–119 Static Mode 120–179 Jump Mode 180–239 Gradual Change Mode 240–255 Sound Mode