
MegaLite

Followbot 1000W

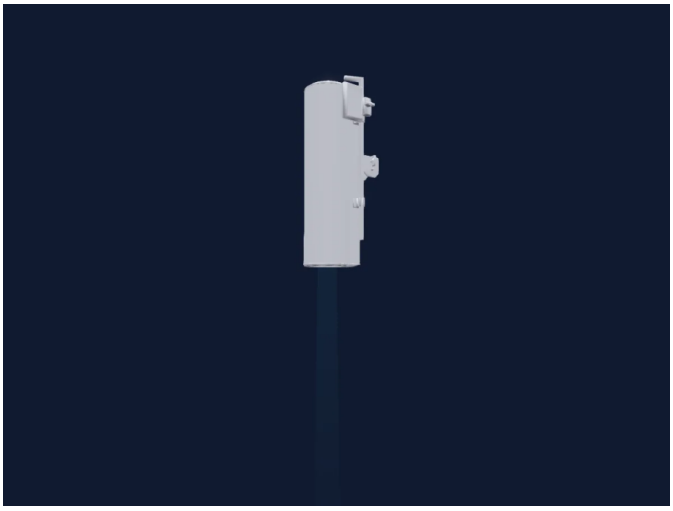

Manufacturer	**MegaLite**
Type	**Profile spot**
DMX modes	**1**
DMX footprint	**8 channels**
Beam angle	**3-6°**
Size (W × H × D)	**281 × 129 × 113 mm**
GDTF fixture type	**A0181B3C-506B-11EE-A36C-52…**

Controls

Focus · Frost · Iris · Zoom · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

8Ch Mode	8 ch

8Ch Mode

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	C TC	0	0–63 Open - CTC 64–127 63K CTO - CTC 128–191 52K CTO - CTC 192–255 33K CTO - CTC
3	Shutter / Strobe	0	0–1 Open - Shutter Open 2–127 Strobe S > F - Strobe 128–159 Pulse S > F - Strobe Pulse Open 160–191 Reverse Pulse S > F - Strobe Pulse Closed 192–255 Strobe Random S > F - Strobe Random
4	Iris	0	0–0 Max 1–254 Max > Min 255–255 Min
5	Color Wheel	0	0–31 Open - Color (wheel slot 1) 32–63 Red - Color (wheel slot 2) 64–95 Green - Color (wheel slot 3) 96–127 Yellow - Color (wheel slot 4) 128–159 Blue - Color (wheel slot 5) 160–191 Orange - Color (wheel slot 6) 192–223 Purpe - Color (wheel slot 7) 224–255 Aqua - Color (wheel slot 8)
6	Zoom	127	0–0 Narrow 1–254 Narrow > Wide 255–255 Wide
7	Focus	127	0–0 Min 1–254 Min > Max 255–255 Max
8	Frost1	0	0–15 No Function - Custom 16–255 Diffusion Engage - Full Frost