
MegaLite

Outshine Flash Strip TW

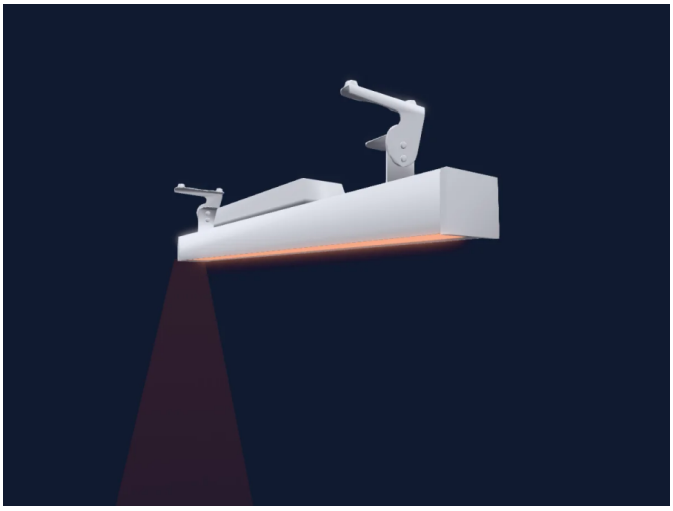

Manufacturer	**MegaLite**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**5, 14, 96, 110 channels**
Beam angle	**25°**
Heads / cells	**25**
Size (W × H × D)	**781 × 100 × 132 mm**
GDTF fixture type	**1636730F-AC93-11EF-ACF3-420…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

5Ch Mode	5 ch
14Ch Mode	14 ch
96Ch Mode	96 ch
110Ch Mode	110 ch

5Ch Mode

5 channels

Ch	Function	Default	DMX values
1	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
4	White	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Color Add RY	255	0–0 Min 1–254 Min > Max 255–255 Max

14Ch Mode

14 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Red	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Green	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Blue	255	0–0 Min 1–254 Min > Max 255–255 Max
5	White	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add RY	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–149 Pulse Strobe S > F - Strobe Pulse Random 150–199 Strobe Random All S > F - Strobe Random 200–255 Strobe Random Each S > F - Strobe Random
8	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–149 Pulse Strobe S > F - Strobe Pulse Random 150–199 Strobe Random All S > F - Strobe Random 200–255 Strobe Random Each S > F - Strobe Random

14Ch Mode (continued)

Ch	Function	Default	DMX values
9	Effect	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
10	Effect Speed	0	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Effects1	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
12	Color Macro1Rate	0	0–0 Min 1–254 Min > Max 255–255 Max
13	Effect 2	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
14	Effect Speed 2	0	0–0 Min 1–254 Min > Max 255–255 Max

96Ch Mode

96 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Red	255	
5	Green	255	
6	Blue	255	
7	Red	255	
8	Green	255	
9	Blue	255	
10	Red	255	
11	Green	255	
12	Blue	255	
13	Red	255	
14	Green	255	
15	Blue	255	
16	Red	255	
17	Green	255	
18	Blue	255	
19	Red	255	
20	Green	255	
21	Blue	255	
22	Red	255	
23	Green	255	
24	Blue	255	
25	Red	255	
26	Green	255	
27	Blue	255	
28	Red	255	
29	Green	255	
30	Blue	255	
31	Red	255	
32	Green	255	
33	Blue	255	
34	Red	255	
35	Green	255	
36	Blue	255	
37	Red	255	
38	Green	255	
39	Blue	255	
40	Red	255	
41	Green	255	
42	Blue	255	
43	Red	255	
44	Green	255	
45	Blue	255	

96Ch Mode (continued)

Ch	Function	Default	DMX values
46	Red	255	
47	Green	255	
48	Blue	255	
49	Red	255	
50	Green	255	
51	Blue	255	
52	Red	255	
53	Green	255	
54	Blue	255	
55	Red	255	
56	Green	255	
57	Blue	255	
58	Red	255	
59	Green	255	
60	Blue	255	
61	Red	255	
62	Green	255	
63	Blue	255	
64	Red	255	
65	Green	255	
66	Blue	255	
67	Red	255	
68	Green	255	
69	Blue	255	
70	Red	255	
71	Green	255	
72	Blue	255	
73	White	255	
74	White	255	
75	White	255	
76	White	255	
77	White	255	
78	White	255	
79	White	255	
80	White	255	
81	White	255	
82	White	255	
83	White	255	
84	White	255	
85	Color Add RY	255	
86	Color Add RY	255	
87	Color Add RY	255	
88	Color Add RY	255	
89	Color Add RY	255	
90	Color Add RY	255	

96Ch Mode (continued)

Ch	Function	Default	DMX values
91	Color Add RY	255	
92	Color Add RY	255	
93	Color Add RY	255	
94	Color Add RY	255	
95	Color Add RY	255	
96	Color Add RY	255	

110Ch Mode

110 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Color Add RY	255	
7	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–149 Pulse Strobe S > F - Strobe Pulse Random 150–199 Strobe Random All S > F - Strobe Random 200–255 Strobe Random Each S > F - Strobe Random
8	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–149 Pulse Strobe S > F - Strobe Pulse Random 150–199 Strobe Random All S > F - Strobe Random 200–255 Strobe Random Each S > F - Strobe Random
9	Effect	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
10	Effect Speed	0	
11	Color Effects1	0	
12	Color Macro1Rate	0	

110Ch Mode (continued)

Ch	Function	Default	DMX values
13	Effect 2	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
14	Effect Speed 2	0	
15	Red	255	
16	Green	255	
17	Blue	255	
18	Red	255	
19	Green	255	
20	Blue	255	
21	Red	255	
22	Green	255	
23	Blue	255	
24	Red	255	
25	Green	255	
26	Blue	255	
27	Red	255	
28	Green	255	
29	Blue	255	
30	Red	255	
31	Green	255	
32	Blue	255	
33	Red	255	
34	Green	255	
35	Blue	255	
36	Red	255	
37	Green	255	
38	Blue	255	
39	Red	255	
40	Green	255	
41	Blue	255	
42	Red	255	
43	Green	255	
44	Blue	255	
45	Red	255	
46	Green	255	

110Ch Mode (continued)

Ch	Function	Default	DMX values
47	Blue	255	
48	Red	255	
49	Green	255	
50	Blue	255	
51	Red	255	
52	Green	255	
53	Blue	255	
54	Red	255	
55	Green	255	
56	Blue	255	
57	Red	255	
58	Green	255	
59	Blue	255	
60	Red	255	
61	Green	255	
62	Blue	255	
63	Red	255	
64	Green	255	
65	Blue	255	
66	Red	255	
67	Green	255	
68	Blue	255	
69	Red	255	
70	Green	255	
71	Blue	255	
72	Red	255	
73	Green	255	
74	Blue	255	
75	Red	255	
76	Green	255	
77	Blue	255	
78	Red	255	
79	Green	255	
80	Blue	255	
81	Red	255	
82	Green	255	
83	Blue	255	
84	Red	255	
85	Green	255	
86	Blue	255	
87	White	255	
88	White	255	
89	White	255	
90	White	255	
91	White	255	

110Ch Mode (continued)

Ch	Function	Default	DMX values
92	White	255	
93	White	255	
94	White	255	
95	White	255	
96	White	255	
97	White	255	
98	White	255	
99	Color Add RY	255	
100	Color Add RY	255	
101	Color Add RY	255	
102	Color Add RY	255	
103	Color Add RY	255	
104	Color Add RY	255	
105	Color Add RY	255	
106	Color Add RY	255	
107	Color Add RY	255	
108	Color Add RY	255	
109	Color Add RY	255	
110	Color Add RY	255	