
OXO Light

Colorbeam 480

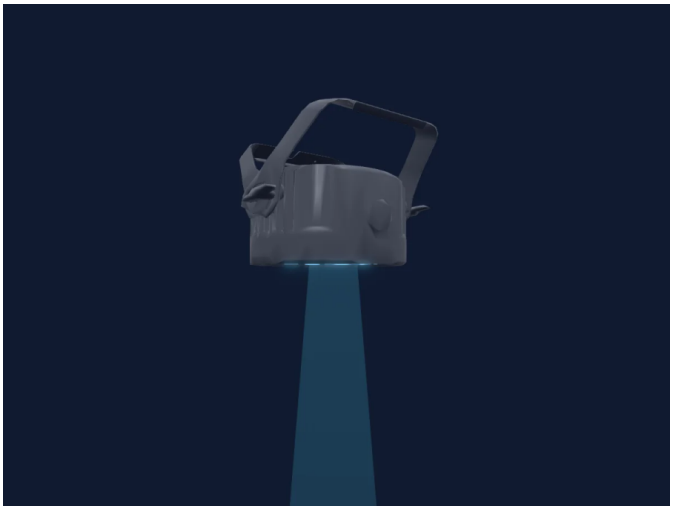

Manufacturer	**OXO Light**
Type	**PAR**
DMX modes	**3**
DMX footprint	**5, 8, 13 channels**
Beam angle	**11°**
Size (W × H × D)	**400 × 200 × 400 mm**
GDTF fixture type	**BDB783D1-0507-4BE1-A983-D…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

Safety-relevant functions

Fixture reset · Strobe

DMX modes

Mode 5CH	5 ch
Mode 8CH	8 ch
Mode 13CH	13 ch

Mode 5CH

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	

Mode 8CH

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Shutter / Strobe	15	0–10 Closed 11–20 Open 21–80 Strobe 81–90 Open 91–150 StrobePulse 151–160 Open 161–220 StrobeRandom 221–230 Zoom Reset after 5 sec 231–255 Open
7	Color Macro1	0	
8	Color Macro1Rate	0	

Mode 13CH

13 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Red	0	
4	Red Fine	0	Fine byte of Red
5	Green	0	
6	Green Fine	0	Fine byte of Green
7	Blue	0	
8	Blue Fine	0	Fine byte of Blue
9	White	0	
10	White Fine	0	Fine byte of White
11	Shutter / Strobe	15	0–10 Closed 11–20 Open 21–80 Strobe 81–90 Open 91–150 StrobePulse 151–160 Open 161–220 StrobeRandom 221–230 Zoom Reset after 5sec 231–255 Open
12	Color Macro1	0	

Mode 13CH (continued)

Ch	Function	Default	DMX values
13	Color Macro1Rate	0	