
Pro Church Lights

Zoom Pro 12

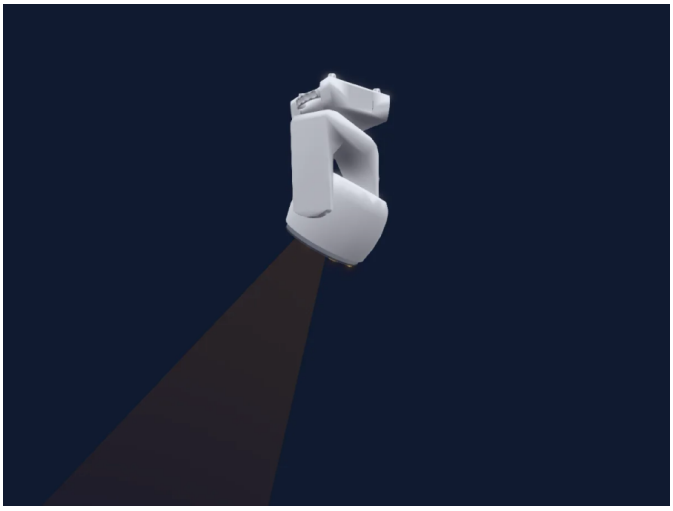

Manufacturer	**Pro Church Lights**
Type	**Moving head**
DMX modes	**2**
DMX footprint	**19, 67 channels**
Beam angle	**5-60°**
Pan range	**540°**
Tilt range	**230°**
Size (W × H × D)	**299 × 190 × 290 mm**
GDTF fixture type	**18CC063D-A584-4F9C-8FAB-EC…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Effect speed · Dimmer · Pan and tilt · Movement speed

Safety-relevant functions

Fixture reset · Built-in effect programmes

DMX modes

19 Channel Mode	19 ch
67 Channel Mode	67 ch

19 Channel Mode

19 channels

Ch	Function	Default	DMX values
1	Pan	127	0–126 Min 127–254 Home 255–255 Max
2	Pan Fine	255	Fine byte of Pan
3	Tilt	127	0–126 Min 127–254 Home 255–255 Max
4	Tilt Fine	255	Fine byte of Tilt
5	Position MSpeed	0	0–0 Min 1–254 Min > Max 255–255 Max
6	Zoom	127	0–0 Wide 1–254 Wide to Narrow 255–255 Narrow
7	Dimmer	0	
8	Strobe Mode Strobe	0	
9	Color RGBRed	255	
10	Color RGBGreen	255	
11	Color RGBBlue	255	
12	White	0	
13	C TO	0	
14	Color Effects1	0	
15	Effect	0	
16	Effect Speed	0	
17	Color Macro1	0	
18	Color Macro1Rate	0	
19	Control1	0	

67 Channel Mode

67 channels

Ch	Function	Default	DMX values
1	Pan	127	
2	Pan Fine	255	Fine byte of Pan
3	Tilt	127	
4	Tilt Fine	255	Fine byte of Tilt
5	Position MSpeed	0	
6	Zoom	127	
7	Dimmer	255	
8	Strobe Mode Strobe	0	
9	Color RGBRed	255	
10	Color RGBGreen	255	
11	Color RGBBlue	255	
12	White	0	
13	C TO	0	
14	Color Effects1	0	
15	Effect	0	
16	Effect Speed	0	
17	Color Macro1	0	

67 Channel Mode (continued)

Ch	Function	Default	DMX values
18	Color Macro1Rate	0	
19	Control1	0	
20	Color RGBRed	255	
21	Color RGBGreen	255	
22	Color RGBBlue	255	
23	White	0	
24	Color RGBRed	255	
25	Color RGBGreen	255	
26	Color RGBBlue	255	
27	White	0	
28	Color RGBRed	255	
29	Color RGBGreen	255	
30	Color RGBBlue	255	
31	White	0	
32	Color RGBRed	255	
33	Color RGBGreen	255	
34	Color RGBBlue	255	
35	White	0	
36	Color RGBRed	255	
37	Color RGBGreen	255	
38	Color RGBBlue	255	
39	White	0	
40	Color RGBRed	255	
41	Color RGBGreen	255	
42	Color RGBBlue	255	
43	White	0	
44	Color RGBRed	255	
45	Color RGBGreen	255	
46	Color RGBBlue	255	
47	White	0	
48	Color RGBRed	255	
49	Color RGBGreen	255	
50	Color RGBBlue	255	
51	White	0	
52	Color RGBRed	255	
53	Color RGBGreen	255	
54	Color RGBBlue	255	
55	White	0	
56	Color RGBRed	255	
57	Color RGBGreen	255	
58	Color RGBBlue	255	
59	White	0	
60	Color RGBRed	255	
61	Color RGBGreen	255	
62	Color RGBBlue	255	

67 Channel Mode (continued)

Ch	Function	Default	DMX values
63	White	0	
64	Color RGBRed	255	
65	Color RGBGreen	255	
66	Color RGBBlue	255	
67	White	0	